



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> :

G01S

A2

(11) International Publication Number:

WO 00/34798

(43) International Publication Date:

15 June 2000 (15.06.00)

(21) International Application Number: PCT/US99/29055

(22) International Filing Date: 7 December 1999 (07.12.99)

(30) Priority Data:

09/206,627

7 December 1998 (07.12.98)

US

(71) Applicant (for all designated States except US): GLOBAL TRAK, INC. [US/US]; 2003 U.S. Highway 90, Liberty, TX 77575 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ALLEN, Alvin, C., Jr. [US/US]; 1343 County Road 2005, Liberty, TX 77575 (US).


(74) Agent: SPEIGHT, Howard, L.; Two Memorial City Plaza, Suite 1360, 820 Gessner, Houston, TX 77024 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING

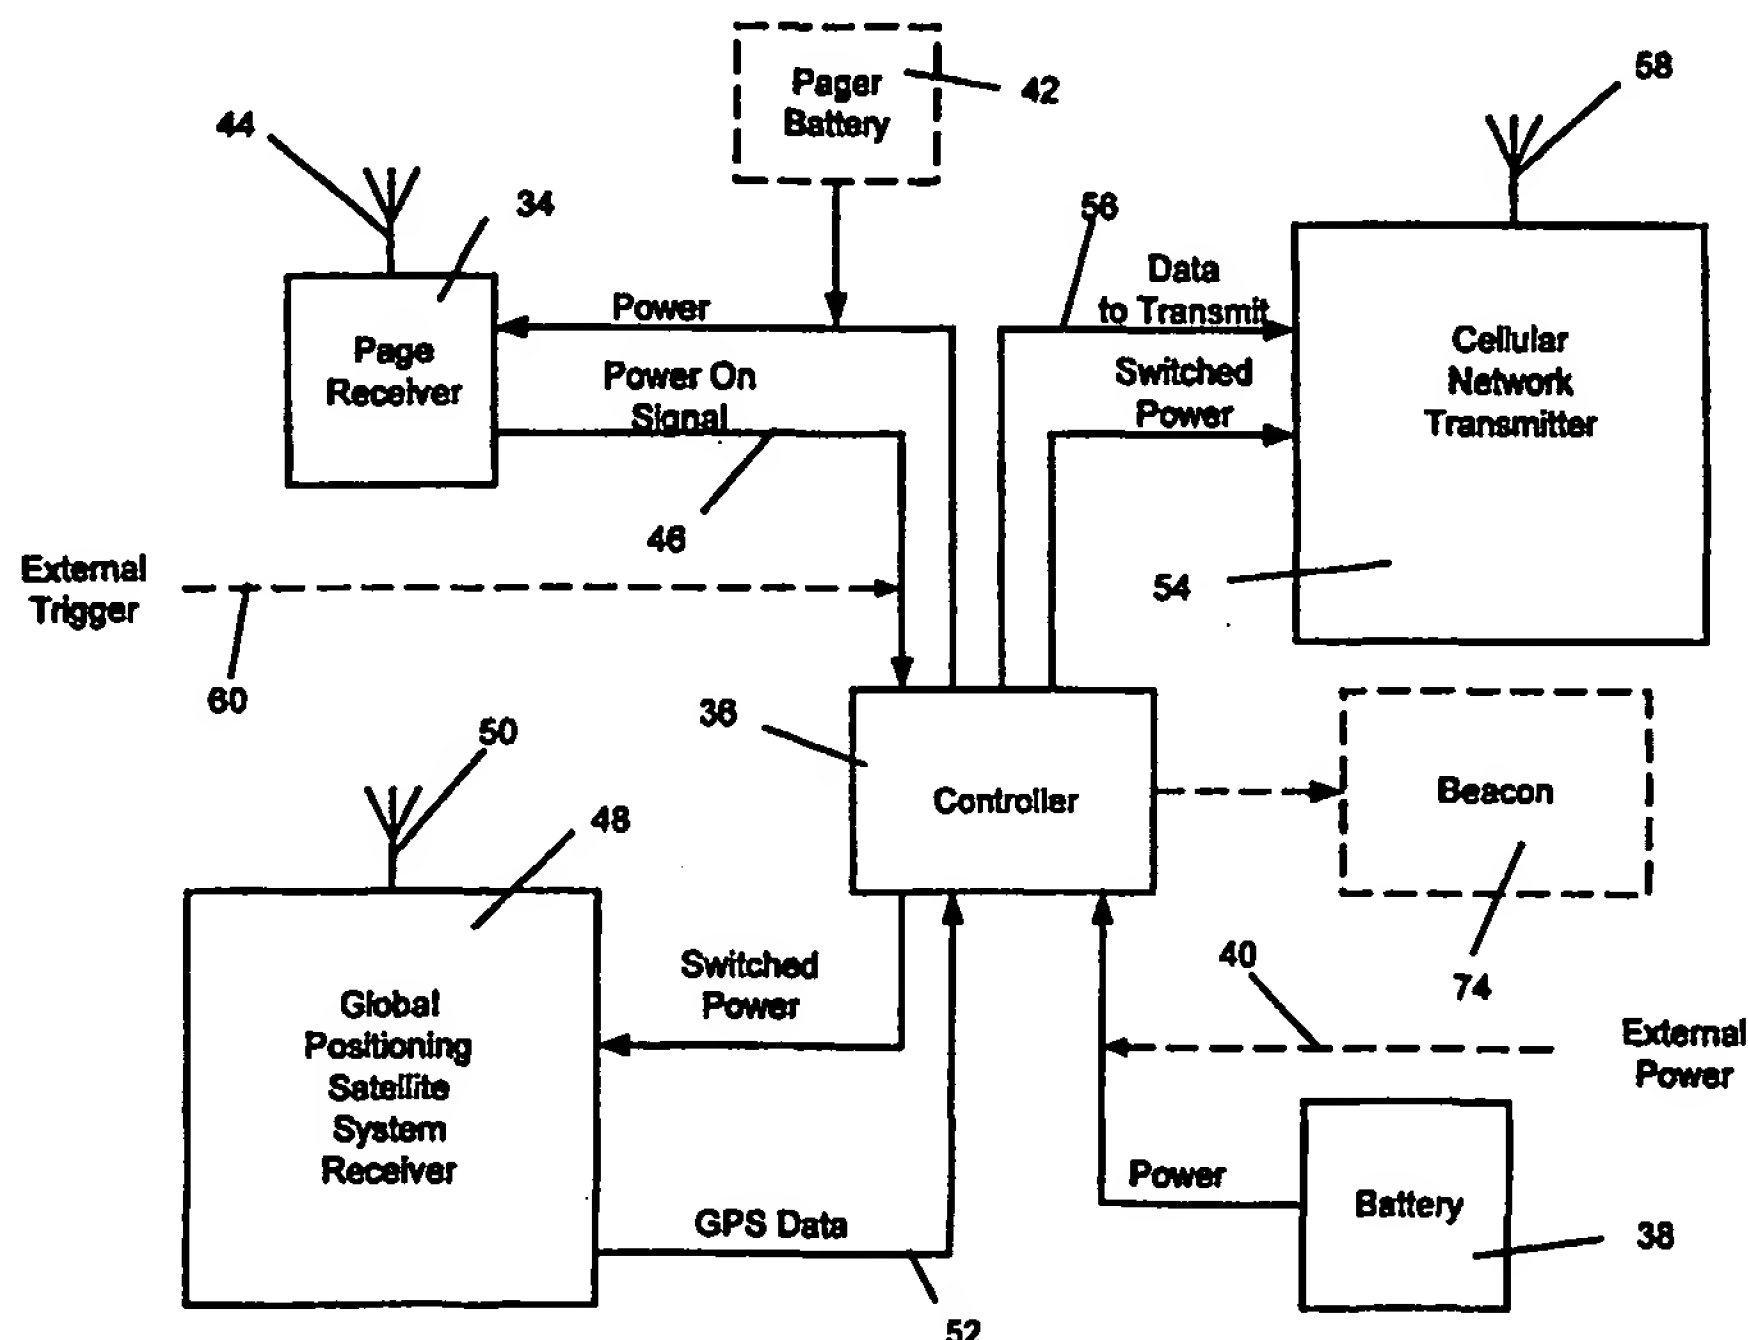

## (57) Abstract

A triggerable location-reporting apparatus is disclosed. A trigger signal from a page receiver triggers a GPS receiver to determine the location of the apparatus using GPS signals. The resulting GPS signal is transmitted by a telemetry transmitter, such as a cellular network telemetry transmitter.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING

**Field of the Invention**

This invention relates generally to location reporting apparatus and methods. More particularly, this invention relates to location reporting apparatus and methods that use the Global Positioning Satellite System (“GPS”) to ascertain an object’s location. Even more particularly, this invention relates to location reporting apparatus and methods that are triggerable and that report their location derived from GPS signals, via telemetry.

## **Background of the Invention**

Frequently, people use credit to purchase consumer items, such as automobiles, televisions or computers. The purchasers take possession of the item and take it to their homes or offices and put them into use. They are responsible for making periodic payments to the creditor, the person or entity that extended the credit, to pay off the loan. The creditor retains a lien on the property and is also known as a “lien-holder”.

In today's mobile society, people frequently move from one location to  
20 another. When they move, they typically take their possessions, including those  
possessions covered by a lien held by the lien-holder. Sometimes when they move  
they stop making their periodic payments to the lien-holder, perhaps believing that  
they no longer have to make payments and that the lien-holder will not be able to  
locate them.

25 Further, some people simply move a possession, such as an automobile, covered by a lien, in order to hide it from the lien-holder when they stop making payments.

In either case, the lien-holder is faced with having to locate and take possession of the item covered by the lien. At times, such a process can be expensive, time consuming, and even dangerous, requiring the lien-holder to hire investigators to

locate the debtor and, hopefully, the item covered by the lien.

Stolen items present a similar challenge. In the case of automobiles, thieves can steal a car, take it to a “chop shop”, or a specially outfitted body shop where the automobile is dismantled into salable parts in just a few hours. The traditional  
5 response to an automobile theft is to report the theft to the police who then do their best to find the automobile before it is dismantled.

Other consumer items can be dismantled or otherwise placed into an underground market within just a few hours of their theft. Alternatively, such items can be removed to the thief’s home, where they are hidden from the eyes of the police  
10 or other investigators.

Even people are subject to being “stolen”, or kidnapped. Again, the traditional response is to report a missing person to the police and other law enforcement agencies who then conduct a search for the missing person.

#### **Summary of the Invention**

15 Upon receipt of a page or the occurrence of another triggering action, the invention determines its location using GPS signals and reports the location via cellular or satellite telemetry. The telemetry is routed to a service provider, which takes an appropriate action, such as informing the lien-holder of the location of the object covered by the lien.

20 In general, in one aspect, the invention features a triggerable location-reporting apparatus comprising a trigger signal, a GPS processor coupled to the trigger signal, a position signal carrying position information generated by the GPS processor in response to the trigger signal, a telemetry transmitter coupled to the position signal, and a telemetry transmit signal transmitted by the telemetry transmitter, the telemetry  
25 transmit signal carrying the position information.

Implementations of the invention may include one or more of the following. The apparatus may include a power supply connection, a first switchable power signal coupled to the GPS processor and the power supply connection, and a second switchable power signal coupled to the telemetry transmitter and the power supply connection. The apparatus may include a controller configured to switch on and off the first switchable power signal and the second switchable power signal. The apparatus may include a power supply coupled to the power supply connection. The power supply may comprise a battery, a solar cell or a vehicle battery. The page receiver, GPS processor and telemetry transmitter may be housed in a housing. The housing may be configured to be installed in a vehicle. The housing may comprise at least a portion of an article of clothing. The housing may be configured to be installed in an object to be tracked. The telemetry transmitter may comprise a cellular telemetry transmitter. The telemetry transmitter may comprise a satellite telemetry transmitter, a cellular telephone, or a radio-telephone. The trigger signal source may comprise a page receiver, the trigger signal activating when the page receiver receives a page. The trigger signal source may comprise an alarm or a remote control.

In general, in another aspect, the invention features a method for reporting a location for an object comprising receiving a page; determining, in response to the page, the location of the object using GPS signals; transmitting the location of the object via telemetry.

Implementations of the invention may include one or more of the following. The method may include applying power to a GPS receiver and a cellular telemetry transmitter upon receipt of the page, and disconnecting power from the GPS receiver and the cellular telemetry transmitter upon transmission of the location of the object. The method may include receiving the transmitted location at a gateway and communicating the transmitted location to a service provider. The method may include transmitting the location of the object via cellular telemetry or via satellite telemetry. The method may include determining if the object is moving and continuing to transmit the location of the object while it is moving. The method may

include storing the location of the object and transmitting the stored location of the object if the ability to determine location ceases.

In general, in another aspect, the invention features a triggerable location-reporting apparatus comprising a location-signal generating device and a telemetry transmitter coupled to the location-signal generating device. The apparatus may comprise a GPS processor. The apparatus may comprise a page receiver and a page signal generated by the page receiver and coupled to the GPS processor. The GPS processor may generate the location signal in response to the page signal. Power may be withheld from the GPS processor until the apparatus receives a page. Power may be withheld from the telemetry transmitter until the apparatus receives a page. The telemetry transmitter may comprise a cellular telemetry transmitter or a satellite telemetry transmitter.

#### **Brief Description of the Drawings**

Fig. 1 is a block diagram of a system incorporating one embodiment of the invention.

Fig. 2 is a block diagram of one embodiment of the apparatus according to the invention.

Fig. 3 is a flow chart of the power management feature.

Fig. 4 is a block diagram of the controller.

Fig. 5 is a block diagram of the formatter.

Fig. 6 is a representation of the data received from the GPS receiver by the data selector.

Fig. 7 is a representation of the data output from the data selector.

Fig. 8 is a block diagram of the power controller.

Fig. 9 is a block diagram of an embodiment of the controller.

Fig. 10 is a block diagram of an embodiment of a system incorporating the invention.

Fig. 11 is a plan drawing of a panic switch according to the present invention.

Fig. 12 is a block diagram of an alternative embodiment of the present

invention.

Fig. 13 is a perspective drawing of the invention incorporated in articles of clothing.

### **Description of the Preferred Embodiments**

5       An object 10, such as an automobile, contains a triggerable location-reporting apparatus 12, as shown in Fig. 1. The apparatus 12 is most likely hidden somewhere in the automobile, and may even be integrated into the body or the engine. For example, the apparatus may be integrated into the automobile's Primary Computer Module. The apparatus can either be connected to the power source associated with  
10 the object, such as the automobile battery, or it may have a self-contained power source or sources, as further discussed below.

The apparatus 12 receives a page from the paging satellite 14 preferably initiated by personnel or some automatic device located at the service provider 16. The page request can be initiated from any source. The service provider 16 accepts  
15 requests from customers to locate objects that have been lost, stolen or otherwise hidden. For example, a lien-holder 18 may request that the service provider 16 locate an object for which the debtor has fallen into default. The service provider's response is to send a page to the apparatus 12.

The page need not originate in the paging satellite 14 but can originate in any  
20 system capable of sending out pages. For example, a cellular network may be capable of sending out pages and could be used instead of the paging satellite 14. Further, the system need not use a page to communicate between the service provider 16 and the apparatus 12 but can use any system that allows the service provider 16 to uniquely address the apparatus 12 via a broadcast signal. For example, very low frequency  
25 signals or HF radio signals could be used to communicate between the service provider 16 and the apparatus 12.

When the apparatus 12 receives the page it determines its location and direction of movement by accessing the signals of the GPS system 20, which comprises a plurality of satellites 22 broadcasting signals which can be used to



determine an object's location and heading anywhere on the earth. The apparatus 12 then formats the location information into a cellular telemetry stream and transmits it via the cellular system's telemetry channels.

In the AMPS (Advanced Mobile Phone System) cellular system, which is the  
5 analog cellular system used in the United States, each cellular base station has 832 channels. The 832 channels are divided among at least two competing cellular carriers. Each cellular carrier uses 21 of the 416 channels to carrying control signals. Each control channel includes a Forward Control Channel (FOCC) and a Reverse Control Channel (RECC).

10 The cellular base station uses the FOCC to send information to cellular telephones and the cellular telephones send information back to the cellular base station via the RECC. The FOCC and RECC are used to establish a cellular telephone call through a local switch. Once the cellular telephone call is established, the call is moved to one of the non-control channels and the released control channel is made  
15 available to establish other cellular telephone calls.

The cellular base station broadcasts a System Identification ("SID") signal, which identifies the cellular system to cellular telephones receiving it. When a cellular telephone is turned on, it compares the SID signal it receives against an SID stored within the telephone, which identifies the cellular telephone's home system. If  
20 the received SID is not the same as the stored SID, the cellular telephone is "roaming" and the "roam" indicator on the telephone is illuminated.

Subsequently, the cellular telephone transmits its identity to the cellular base station via the RECC. The RECC transmission includes the telephone's Mobile Identification Number ("MIN"), which is a unique 10-digit number (analogous to a  
25 telephone number including an area code) that is programmed into the cellular telephone. The first six digits of the MIN identify the cellular telephone's home system. The RECC also includes an Electronic Serial Number ("ESN"), a unique 32-bit serial number permanently stored in the cellular telephone which uniquely identifies the cellular telephone. The cellular base station will receive the MIN and



ESN through the RECC and determine that the MIN does not correspond to a local number. Using the MIN, the cellular base station will determine the home system for the cellular telephone and send a validation signal to that system. The cellular local switches in the United States are interconnected through the Intersystem Signaling Network, IS-41, which allows them to send and receive validation information.

The validation signal, known under IS-41 as a RegistrationNotification Invoke (REGNOT) message, includes the cellular telephone's MIN and ESN. The REGNOT message also includes the identity of the cellular base station sending the message. The cellular telephone's home system will respond with a RegistrationNotification Return Result (regnot) message. In the regnot message, the cellular telephone's home system will either indicate that it will take financial responsibility for calls made by the cellular telephone or it will refuse to validate the cellular telephone. If validation occurs, a subsequent exchange of messages establishes the features (such as call forwarding) available to the cellular telephone.

The validation process just described uses the cellular system's control channels. Again, once a cellular telephone call is initiated the control channel that was used to set up the call is released for other purposes.

At least two companies, Cellemetry and Microburst, have developed systems which allow the transmission of information from a cellular telephone to a gateway using the validation signals. Cellemetry, for example, connects a Cellemetry Service Gateway to an IS-41 on a local switch and registers an SID on the IS-41 network. Cellemetry radios transmit RECC signals to local cellular base stations. The local cellular base stations transmit a validation signal to a Cellemetry gateway.

In the RECC signal transmitted from the Cellemetry radio, the MIN normally transmitted in a RECC signal is replaced by a 10-digit equipment identification number, identifying a Cellemetry gateway. The 32-bit ESN normally transmitted can be used as a "payload" to transmit information from the Cellemetry radio or a device incorporating the Cellemetry radio to the Cellemetry gateway. The Cellemetry gateway strips the payload information from the validation signal and sends it to a

service provider.

The Microburst system is similar except that the payload is 55 bits instead of 32.

A similar system is used in digital cellular telephone applications such as  
5 CDMA and TDMA systems.

Returning to Fig. 1, upon receipt of the page from page satellite 14, the apparatus 12 determines the location and direction of movement, if any, of object 10 using the GPS signals from the GPS system 20. The apparatus then formats the location and movement information into the payload portion of a cellular RECC  
10 signal and transmits it to a local cellular base station 24. The MIN portion of the RECC signal may contain a unique MIN or it may be a MIN that is common to all triggerable location-reporting apparatus serviced by a common service provider. Alternatively, the MIN may be different for each of the apparatus.

The cellular base station 24 determines that the apparatus 12 is a roamer and  
15 passes a validation signal into the IS-41 system 25 via a local switch 26. The common MIN will cause the cellular base station to direct the validation signal to a gateway 28. The gateway 28 receives the validation signal and reads the payload data and provides it to the service provider 16. The gateway may also use the information regarding the cellular base station that originated the validation signal to determine an  
20 approximate location of the cellular telephone and pass that information on to the service provider 16 as well. A company such as Cellemetry or Microburst may provide the gateway or it may be provided by the service provider 16.

The gateway will preferably respond to the cellular base station with a regnot message indicating that the requested roamer status has been denied. The cellular  
25 base station will then know not to try to allocate a voice channel to the apparatus. Alternatively, the gateway will not respond to the cellular base station, which will eventually allow the request to expire.

The service provider 16 can now communicate the location of the object 10 to the owner 30, lien-holder 18, or to the police 32.

A block diagram of the apparatus is shown in Fig. 2. A page receiver 34 receives power through controller 36. Preferably, the power is passed directly through the controller 36. Alternatively, the power may bypass the controller entirely and be applied directly to the page receiver 34. A battery 38 supplies power to the controller  
5 36. Alternatively, an external power source 40 may supply power to the controller 36. As still another alternative, the page receiver 34 may have a pager battery 42 separate from the power supplied to the remaining electronics in the apparatus 12. A separate battery allows the page receiver 34 to remain in a standby state for a long period of time without draining the power supply for the rest of the apparatus.

10 When the page receiver 34 receives a page over antenna 44 that is addressed to the page receiver 34, the page receiver 34 transmits a "power-on" signal 46 to the controller 36. The controller 36 then switches power to a global position satellite system receiver 48, which receives GPS signals via antenna 50. The GPS receiver 48 acquires the GPS signals and determines a variety of position data regarding apparatus  
15 12. The GPS receiver sends the GPS data 52 to the controller 36.

The controller 36 buffers and reformats the GPS data into a form acceptable to a cellular network transmitter 54. The controller then switches power to the cellular network transmitter and sends a "data to transmit" signal 56 to the cellular network transmitter 54. After the cellular network transmitter has had an opportunity to format  
20 the "data to transmit" into the payload section of the RECC signal, the cellular network transmitter 54 transmits the RECC signal, including the GPS payload, via antenna 58. The cellular antenna 58 may be combined with the GPS antenna 50. One or both of these antennas (or their combination) may comprise dielectric and conducting materials embedded in the object or attached to it with an adhesive or  
25 some other attachment mechanism.

Preferably, the power-on signal 46 is provided to the controller 36 as the result of a page received by the page receiver 34, as discussed above. Alternatively, an external trigger 60 may provide the power-on indication to the controller 36.

A flow chart of the power management provided by the controller 36 is

illustrated in Fig. 3. The apparatus 12 receives a page 62. The page receiver wakes up the controller 64. The controller wakes up the GPS receiver and reads the GPS position information 66. The controller wakes up the cellular network transmitter and sends it formatted position information 68. The transmitter transmits the MIN and the payload to the cellular base station which forwards the data via the RECC transmission to the gateway. The controller then puts the cellular network transmitter and GPS receiver back to sleep 70. The controller then goes back to sleep 72. With this power management approach, significant power is being used only when position information is being transmitted over the cellular network. The rest of the time the only drain on system power is the page receiver, which has a very low power requirement when it is waiting for a page. Even this power drain can be eliminated by using a separate pager battery 42, as shown in Fig. 2.

The controller may store the last location signal it receives from the GPS receiver. Consequently, if the apparatus receives a subsequent page and the GPS receiver cannot perform its function (because, for example, it is shielded from GPS satellite signals), the apparatus will report the stored position. The apparatus may also report the amount of time that has elapsed since the position information was stored.

In another embodiment, the apparatus may turn on a homing beacon 74 (see Fig. 2) if the GPS receiver is unable to perform its function. The homing beacon will allow the object to be tracked by a receiver tuned to the beacon frequency.

A block diagram of the controller is shown in Fig. 4. GPS data 52 is received by a formatter 76 from the page receiver 34 where it is buffered and formatted into a form acceptable to the cellular network transmitter 54. The formatter 76 buffers the reformatted signal and then transmits it as a "data to transmit" signal 56.

A block diagram of the data formatter is illustrated in Fig. 5. GPS data 52 is buffered by a buffer 78. A data selector 80 selects data from the buffered GPS data 52 to be transmitted to the cellular network transmitter 54. A buffer and formatter 82 buffer the selected data and convert it into a format acceptable to the cellular network transmitter 54. A memory 84 may be provided to store the last reported position from

the GPS receiver. The properly formatted "data to transmit" signal 56 is then transmitted to the cellular network transmitter 54.

An example of the data selector function is illustrated in Figs. 6 and 7. The Motorola® GT Plus Oncore™ GPS family of chips produces an digital output signal 5 86 containing bits representing the latitude, longitude, height, velocity, and heading of the apparatus 12 and the current time, as shown in Fig. 6. Similar products manufactured by other companies may be used instead of the Motorola product. Preferably, only the bits representing latitude, longitude, velocity and heading 88 are included in the data to transmit signal 56, as shown in Fig. 7. Preferably, the bits 10 representing height and current time are discarded (although they may be sent in alternative embodiments). Further, it may be desirable to change the order that the various portions of the information are transmitted. For example, it may be desirable to send the heading portion first. The data selector selects the data to be transmitted and arranges it into the desired order.

15 Returning to Fig. 4, the controller also performs a power management function, as discussed above. Upon receipt of the power-on signal 46 from the page receiver 34, a power controller 90 opens and closes switch 92 to apply and remove power to the GPS receiver 48. The power controller 90 also opens and closes switch 94 to apply and remove power to the cellular network transmitter 54.

20 A functional block diagram of the power controller is illustrated in Fig. 8. While Fig. 8 shows the use of delayed action relays it should be understood that any electronics that provide the desired function may be used. The power-on signal from the page receiver is applied to two delayed action relays. Relay 96 engages as soon as the power-on signal is applied, which causes switch 92 to close. Sixty seconds later 25 relay 96 disengages, which causes switch 92 to open. The sixty-second power off delay is adjustable as necessary to allow the GPS receiver 48 sufficient on time to acquire the GPS satellites and determine the location of the apparatus.

Relay 98 actuates 45 seconds after the power-on signal is applied. Again, this delay is adjustable so that power is applied to the cellular network transmitter 54 only

after the data to transmit signal 56 has been prepared. The cellular network transmitter 54 is turned off 15 seconds after it is turned on, which allows the cellular network transmitter adequate time to transmit the RECC signal to the cellular base station.

5           The controller may have the ability to determine when the apparatus is moving. It can accomplish this by comparing the location data from the GPS location signal to the location data stored in the memory 84 or by examining the velocity data reported by the GPS receiver. In either case, the controller may leave the GPS receiver power on when the apparatus is moving. The controller can then cause the  
10 location data to be reported from time to time (e.g. every five minutes) through the cellular telemetry network by applying power to the cellular network transmitter for a short period of time. The controller may keep the GPS receiver operational for a period of time after the apparatus stops moving. This allows the apparatus to provide continuous updates on its position while it is moving.

15           Another implementation of the elements enclosed in the dashed box in Fig. 4 is shown in Fig. 9. A microprocessor system 100 receives the power-on signal 46 from the page receiver 34. The microprocessor system may include an interconnected microprocessor, program storage area and data storage area. The storage areas may include random access memory ("RAM") and read only memory ("ROM").  
20 Alternatively, the microprocessor system may be implemented entirely with discrete logic elements or application specific integrated circuits ("ASIC"). The microprocessor system may be implemented with a combination of a microprocessor and discrete and ASIC logic elements.

          When the microprocessor receives the power-on signal its stored program  
25 causes it to assert and un-assert bit outputs 102 and 104 in sequence, as described above. The program may be developed in assembly language, machine language or a higher order language such as C++ or the function of the program may be accomplished with discrete logic or ASICs or a combination of any of these. Preferably, the program is compiled and linked as necessary and stored in one of the



storage areas for execution by the microprocessor to accomplish the described functions.

A buffer 106 receives GPS data 52 from the GPS receiver 48 and buffers it. The microprocessor system 100 extracts the buffered data through input 108, selects  
5 the data to be sent out as payload and rearranges it as necessary. The microprocessor system outputs the selected and arranged data through output 110 to a buffer/formatter 112, which formats the "data to transmit" signal 56.

Alternatively, the microprocessor system 100 may communicate with the GPS receiver 48, the page receiver 34 and the cellular network transmitter 54 via serial or  
10 parallel communication lines 114, 116 and 118, respectively.

An alternative embodiment of the system that does not use the cellular network is illustrated in Fig. 10. In this embodiment, the apparatus 12 communicates its location and heading to the service provider 16 through telemetry communications through satellite 120.

15 In use, for example in the automobile recovery application, a lien-holder would contact the service provider and identify an automobile that the lien-holder wants located. The service provider would cause a page to be sent to the apparatus secured within the automobile. The apparatus would receive the page, ascertain its location using the GPS system, and return the location and heading information to the  
20 service provider. The service provider could then tell the lien-holder the location and heading of the automobile. Because of the power management feature described above, the service provider could "track" the automobile as it is being driven, providing the lien-holder with multiple readings regarding the automobile's location. Further, the apparatus may be configured to provide multiple updates of its position  
25 while it is moving.

The same function could be supplied with respect to any object, including large-screen televisions, computers or any other item.

The apparatus could be used to provide a "panic switch" capability, as illustrated in Fig. 11. For example, panic switch 122 includes a blue switch 124, a



green switch 126, a red switch 128 and a yellow switch 130. Pressing the switches in the correct order (e.g. red, red, green, yellow) will cause the external trigger 60 (Fig. 2) to actuate, causing the position of the panic switch to be reported to through the system illustrated in Fig. 2 to the police or other agency. The police can then query  
5 the apparatus 12 located in the panic switch 122 through the service provider in order to track its location if it is moved.

The apparatus could be adapted to respond to alarm conditions associated with an object, such as the traditional car alarm, as illustrated in Fig. 12. For example, when car alarm 132 is tripped, it actuates external trigger 60 (Fig. 2) causing the  
10 location of the automobile to be reported via the system shown in Fig. 2. Subsequently, the police, the owner or anyone else with the capability can track the automobile through the service provider by sending pages to the apparatus 12.

The apparatus 12 could be used to locate people, as illustrated in Fig. 13. The apparatus 12 could be hidden in a belt buckle or in the heel of a shoe. Subsequently,  
15 if another person became concerned about the location of the person wearing the apparatus, the concerned person could have the service provider page the apparatus 12 and locate and track it as described above.

The foregoing describes preferred embodiments of the invention and is given by way of example only. The invention is not limited to any of the specific features  
20 described herein, but includes all variations thereof within the scope of the appended claims.

What is claimed is:

- 1 1. A triggerable location-reporting apparatus comprising  
2 a trigger signal;  
3 a GPS processor coupled to the trigger signal;  
4 a position signal carrying position information generated by the GPS  
5 processor in response to the trigger signal;  
6 a telemetry transmitter coupled to the position signal;  
7 a telemetry transmit signal transmitted by the telemetry transmitter, the  
8 telemetry transmit signal carrying the position information.
- 1 2. The triggerable location-reporting apparatus of claim 1 further comprising  
2 a power supply connection;  
3 a first switchable power signal coupled to the GPS processor and the  
4 power supply connection;  
5 a second switchable power signal coupled to the telemetry transmitter  
6 and the power supply connection.
- 1 3. The triggerable location-reporting apparatus of claim 2 further comprising  
2 a controller configured to switch on and off the first switchable power  
3 signal and the second switchable power signal.
- 1 4. The triggerable location-reporting apparatus of claim 2 further comprising  
2 a power supply coupled to the power supply connection.
- 1 5. The triggerable location-reporting apparatus of claim 4 wherein  
2 the power supply comprises a battery.
- 1 6. The triggerable location-reporting apparatus of claim 4 wherein  
2 the power supply comprises a solar cell.
- 1 7. The triggerable location-reporting apparatus of claim 4 wherein

2 the power supply comprises a vehicle battery.

1 8. The triggerable location-reporting apparatus of claim 1 wherein  
2 the page receiver, GPS processor and telemetry transmitter are housed  
3 in a housing.

1 9. The triggerable location-reporting apparatus of claim 8 wherein  
2 the housing is configured to be installed in a vehicle.

1 10. The triggerable location-reporting apparatus of claim 8 wherein  
2 the housing comprises at least a portion of an article of clothing.

1 11. The triggerable location-reporting apparatus of claim 8 wherein  
2 the housing is configured to be installed in an object to be tracked.

1 12. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a cellular telemetry transmitter.

1 13. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a satellite telemetry transmitter.

1 14. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a cellular telephone.

1 15. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a radio-telephone.

1 16. The triggerable location-reporting apparatus of claim 1 wherein  
2 the trigger signal source comprises a page receiver;  
3 the trigger signal activating when the page receiver receives a page.

1       17. The triggerable location-reporting apparatus of claim 1 wherein  
2           the trigger signal source comprises an alarm.

1       18. The triggerable location-reporting apparatus of claim 1 wherein  
2           the trigger signal source comprises a remote control.

1       19. A method for reporting a location for an object comprising  
2           receiving a page;  
3           determining, in response to the page, the location of the object using  
4           GPS signals;  
5           transmitting the location of the object via telemetry.

1       20. The method of claim 19 further comprising  
2           applying power to a GPS receiver and a cellular telemetry transmitter  
3           upon receipt of the page;  
4           disconnecting power from the GPS receiver and the cellular telemetry  
5           transmitter upon transmission of the location of the object.

1       21. The method of claim 19 further comprising  
2           receiving the transmitted location at a gateway;  
3           communicating the transmitted location to a service provider.

1       22. The method of claim 19 wherein transmitting comprises  
2           transmitting the location of the object via cellular telemetry.

1       23. The method of claim 19 wherein transmitting comprises  
2           transmitting the location of the object via satellite telemetry.

1       24. The method of claim 19 further comprising  
2           determining if the object is moving; and

3 continuing to transmit the location of the object while it is moving.

1 25. The method of claim 19 further comprising  
2 storing the location of the object; and  
3 transmitting the stored location of the object if the ability to determine  
4 location ceases.

1 26. A triggerable location-reporting apparatus comprising  
2 a location-signal generating device;  
3 a telemetry transmitter coupled to the location-signal generating  
4 device.

1 27. The triggerable location-reporting apparatus of claim 26 wherein the  
2 location-signal generating device comprises  
3 a GPS processor.

1 28. The triggerable location-reporting apparatus of claim 27 further  
2 comprising  
3 a page receiver;  
4 a page signal generated by the page receiver and coupled to the GPS  
5 processor.

1 29. The triggerable location-reporting apparatus of claim 28 wherein  
2 the GPS processor generates the location signal in response to the page  
3 signal.

1 30. The triggerable location-reporting apparatus of claim 28 wherein  
2 power is not applied to the GPS processor until the apparatus receives a  
3 page.

1           31. The triggerable location-reporting apparatus of claim 26 wherein  
2                   power is not applied to the telemetry transmitter until the apparatus  
3                   receives a page.

1           32. The triggerable location-reporting apparatus of claim 26 wherein  
2                   the telemetry transmitter comprises a cellular telemetry transmitter.

1           33. The triggerable location-reporting apparatus of claim 26 wherein  
2                   the telemetry transmitter comprises a satellite telemetry transmitter.

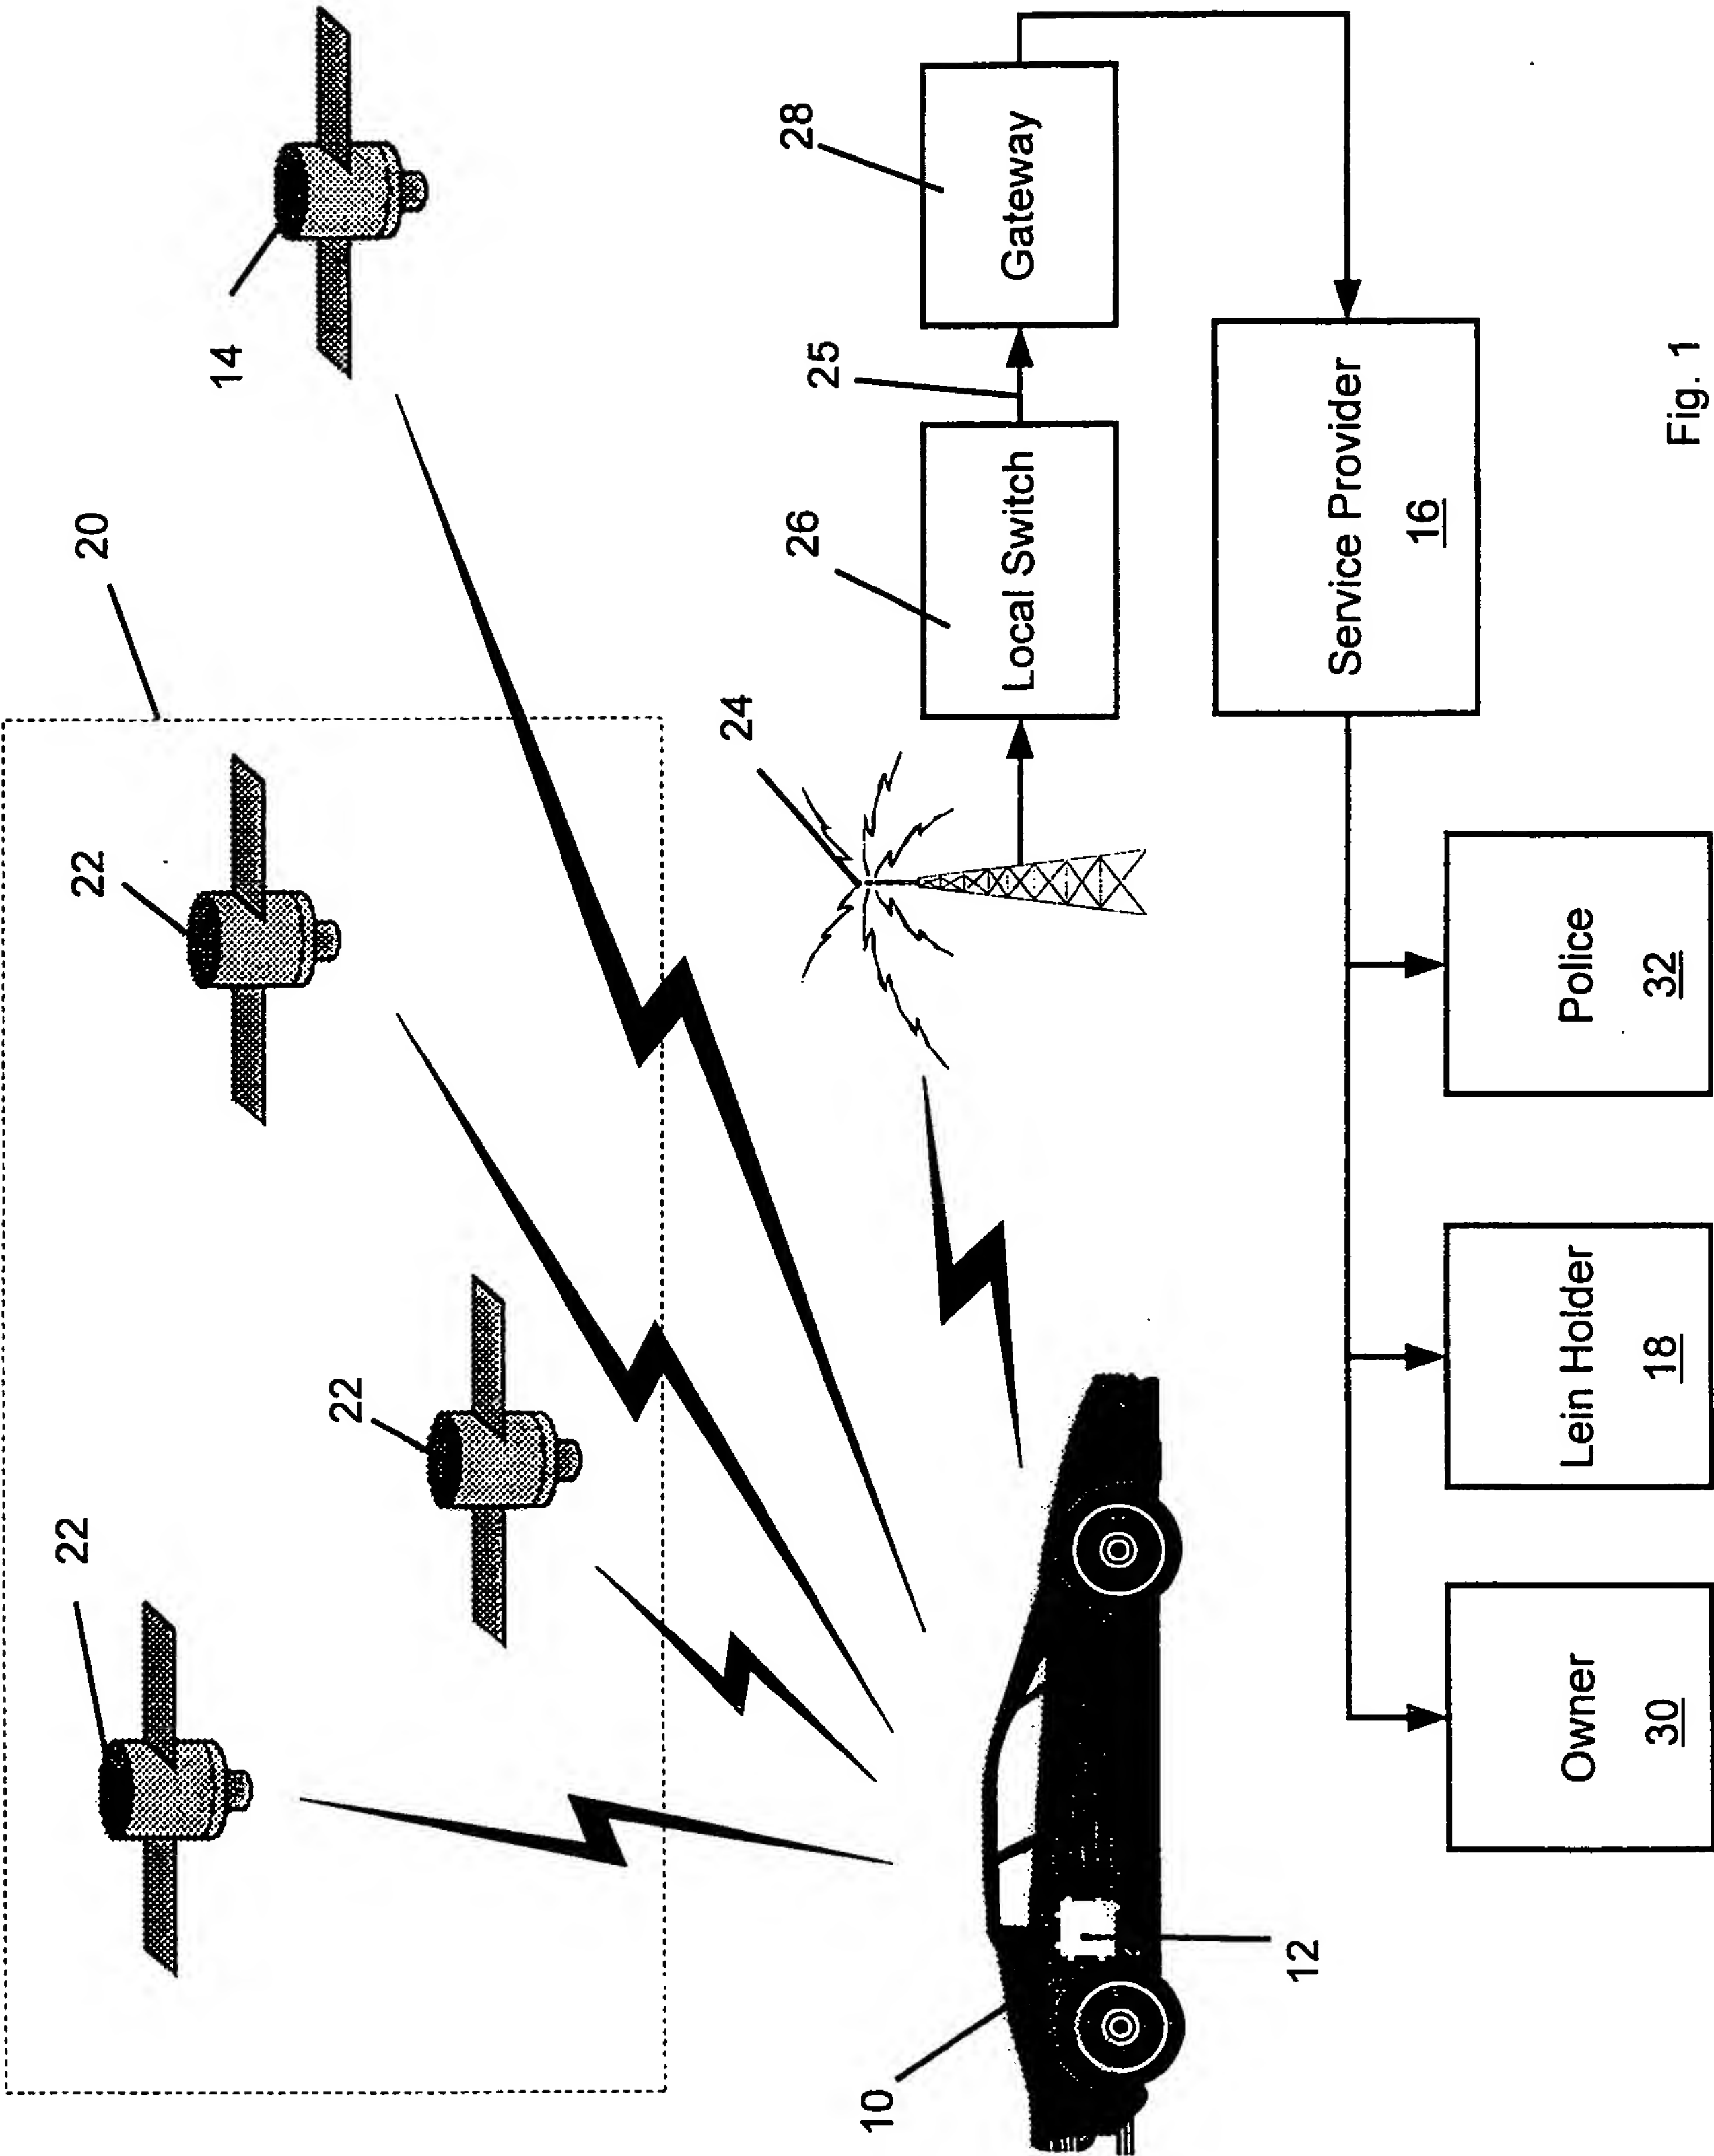


Fig. 1



2/10

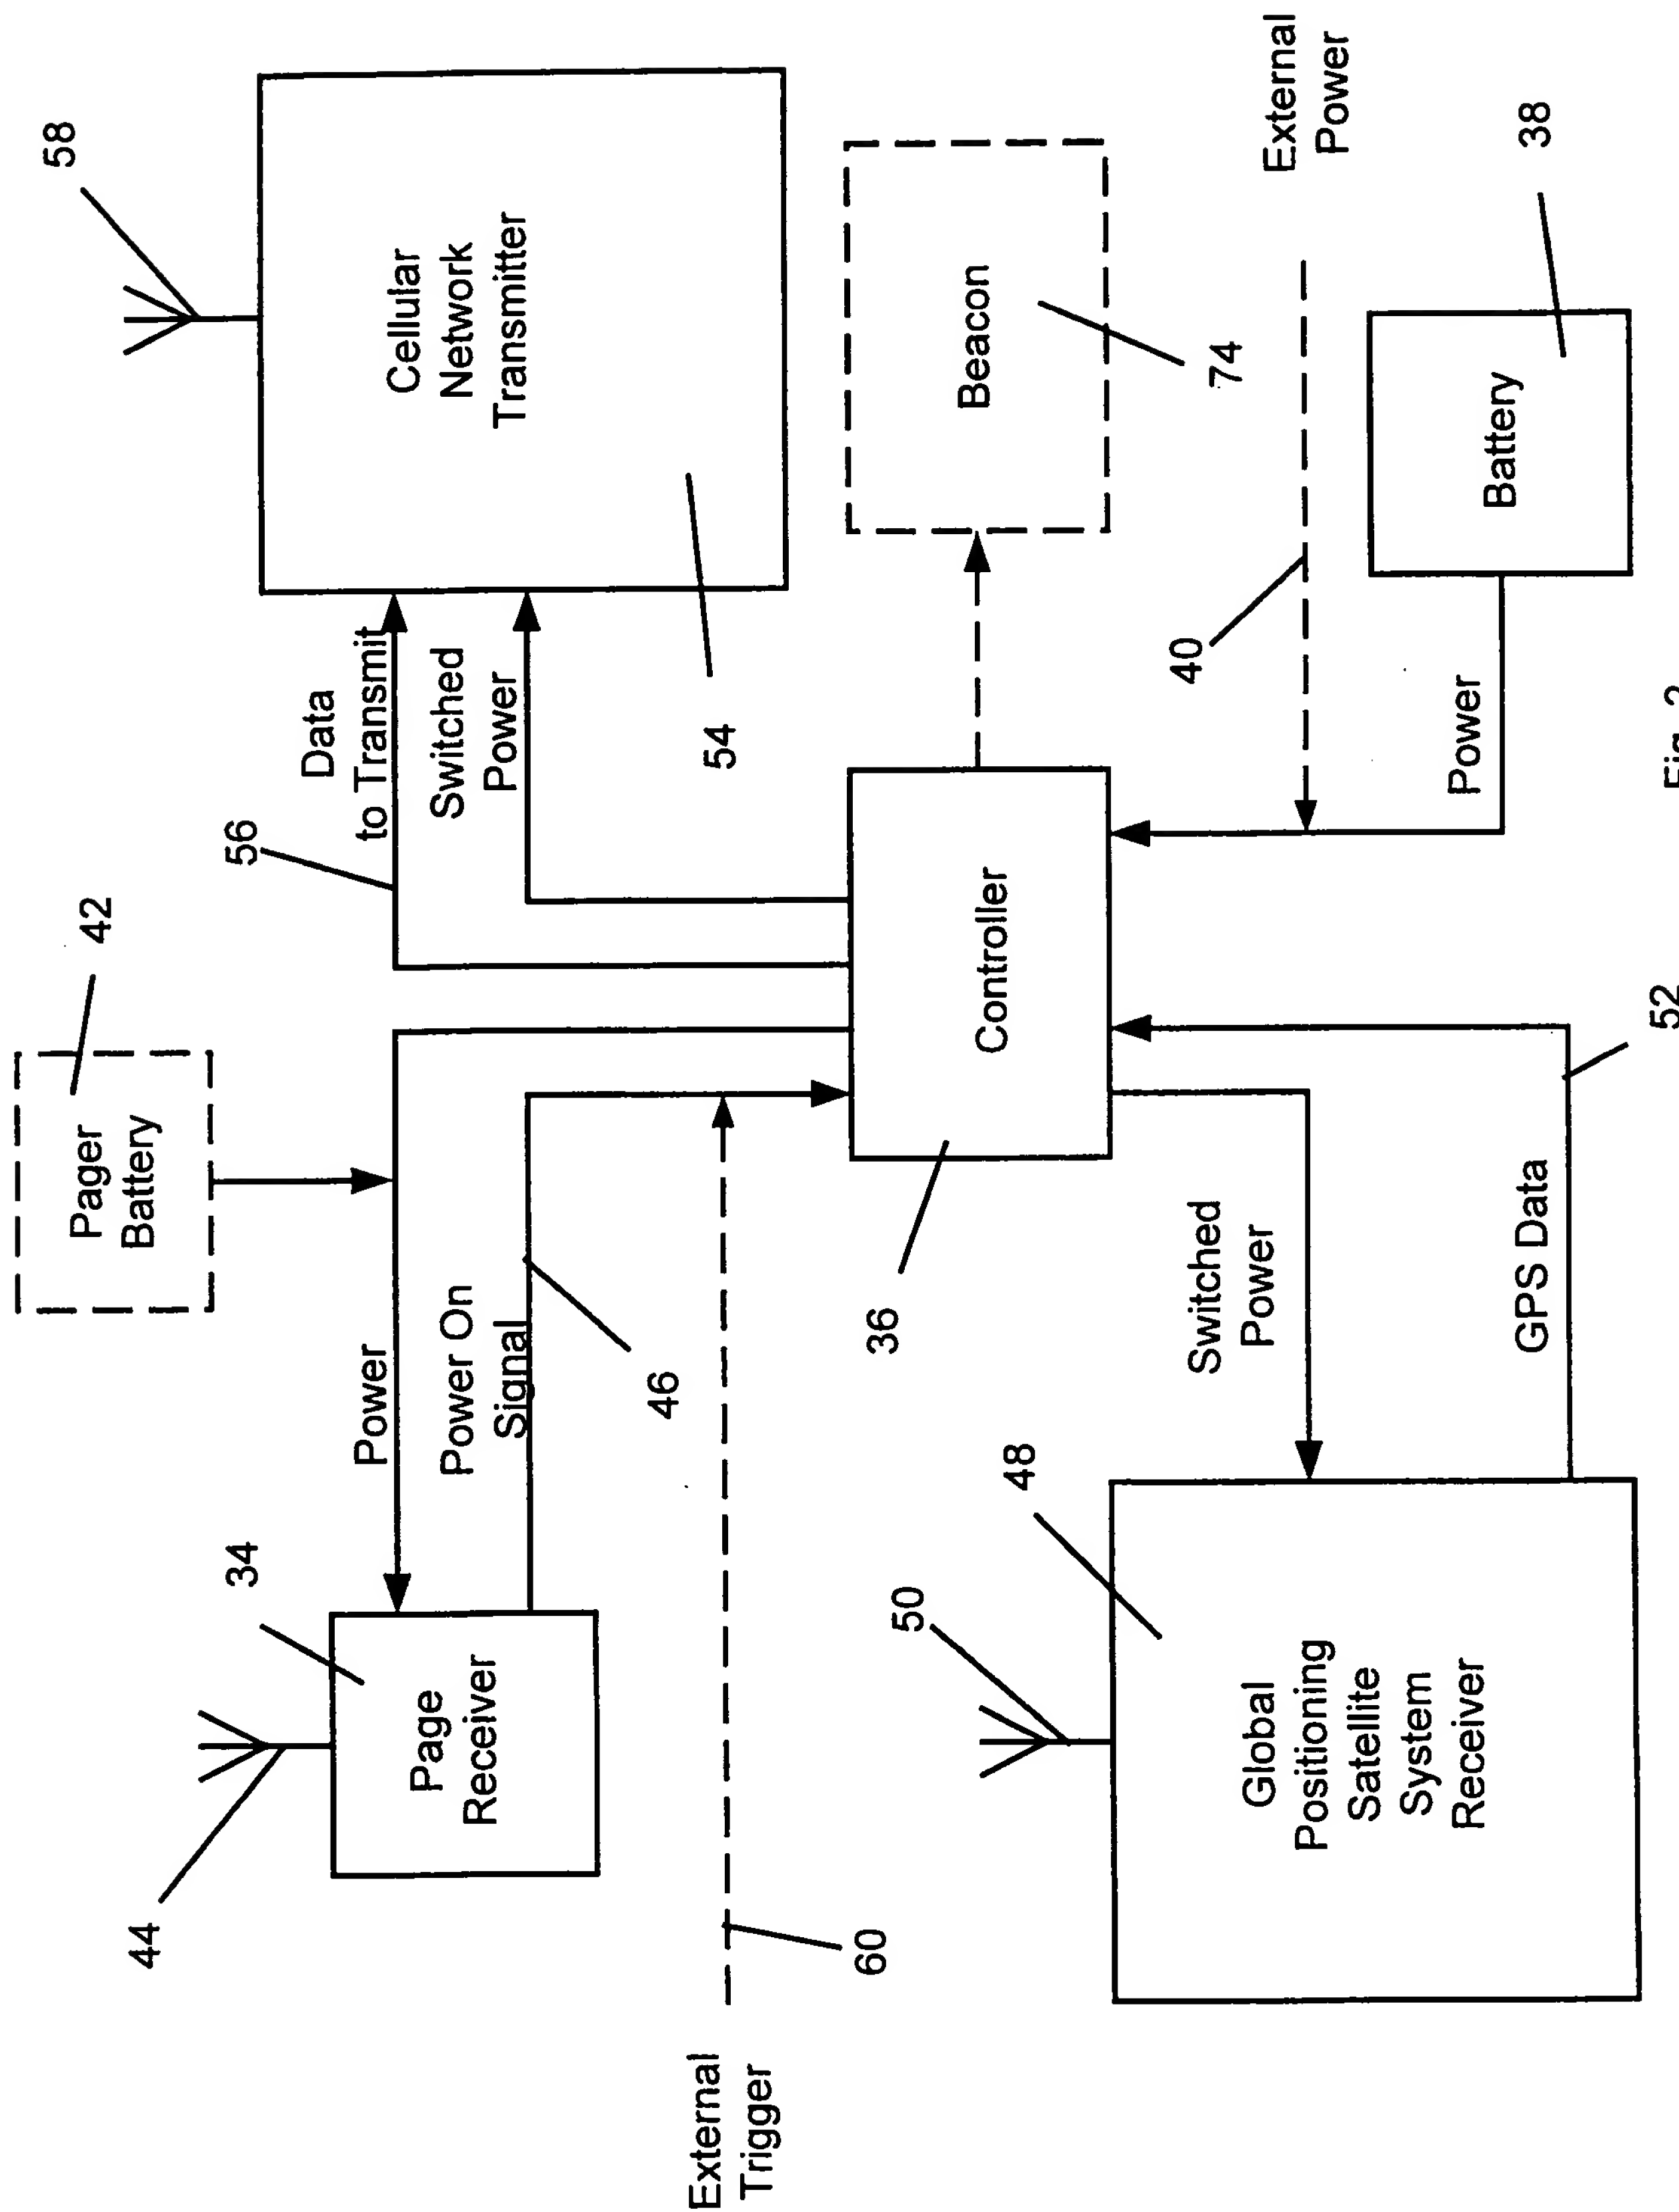


Fig. 2

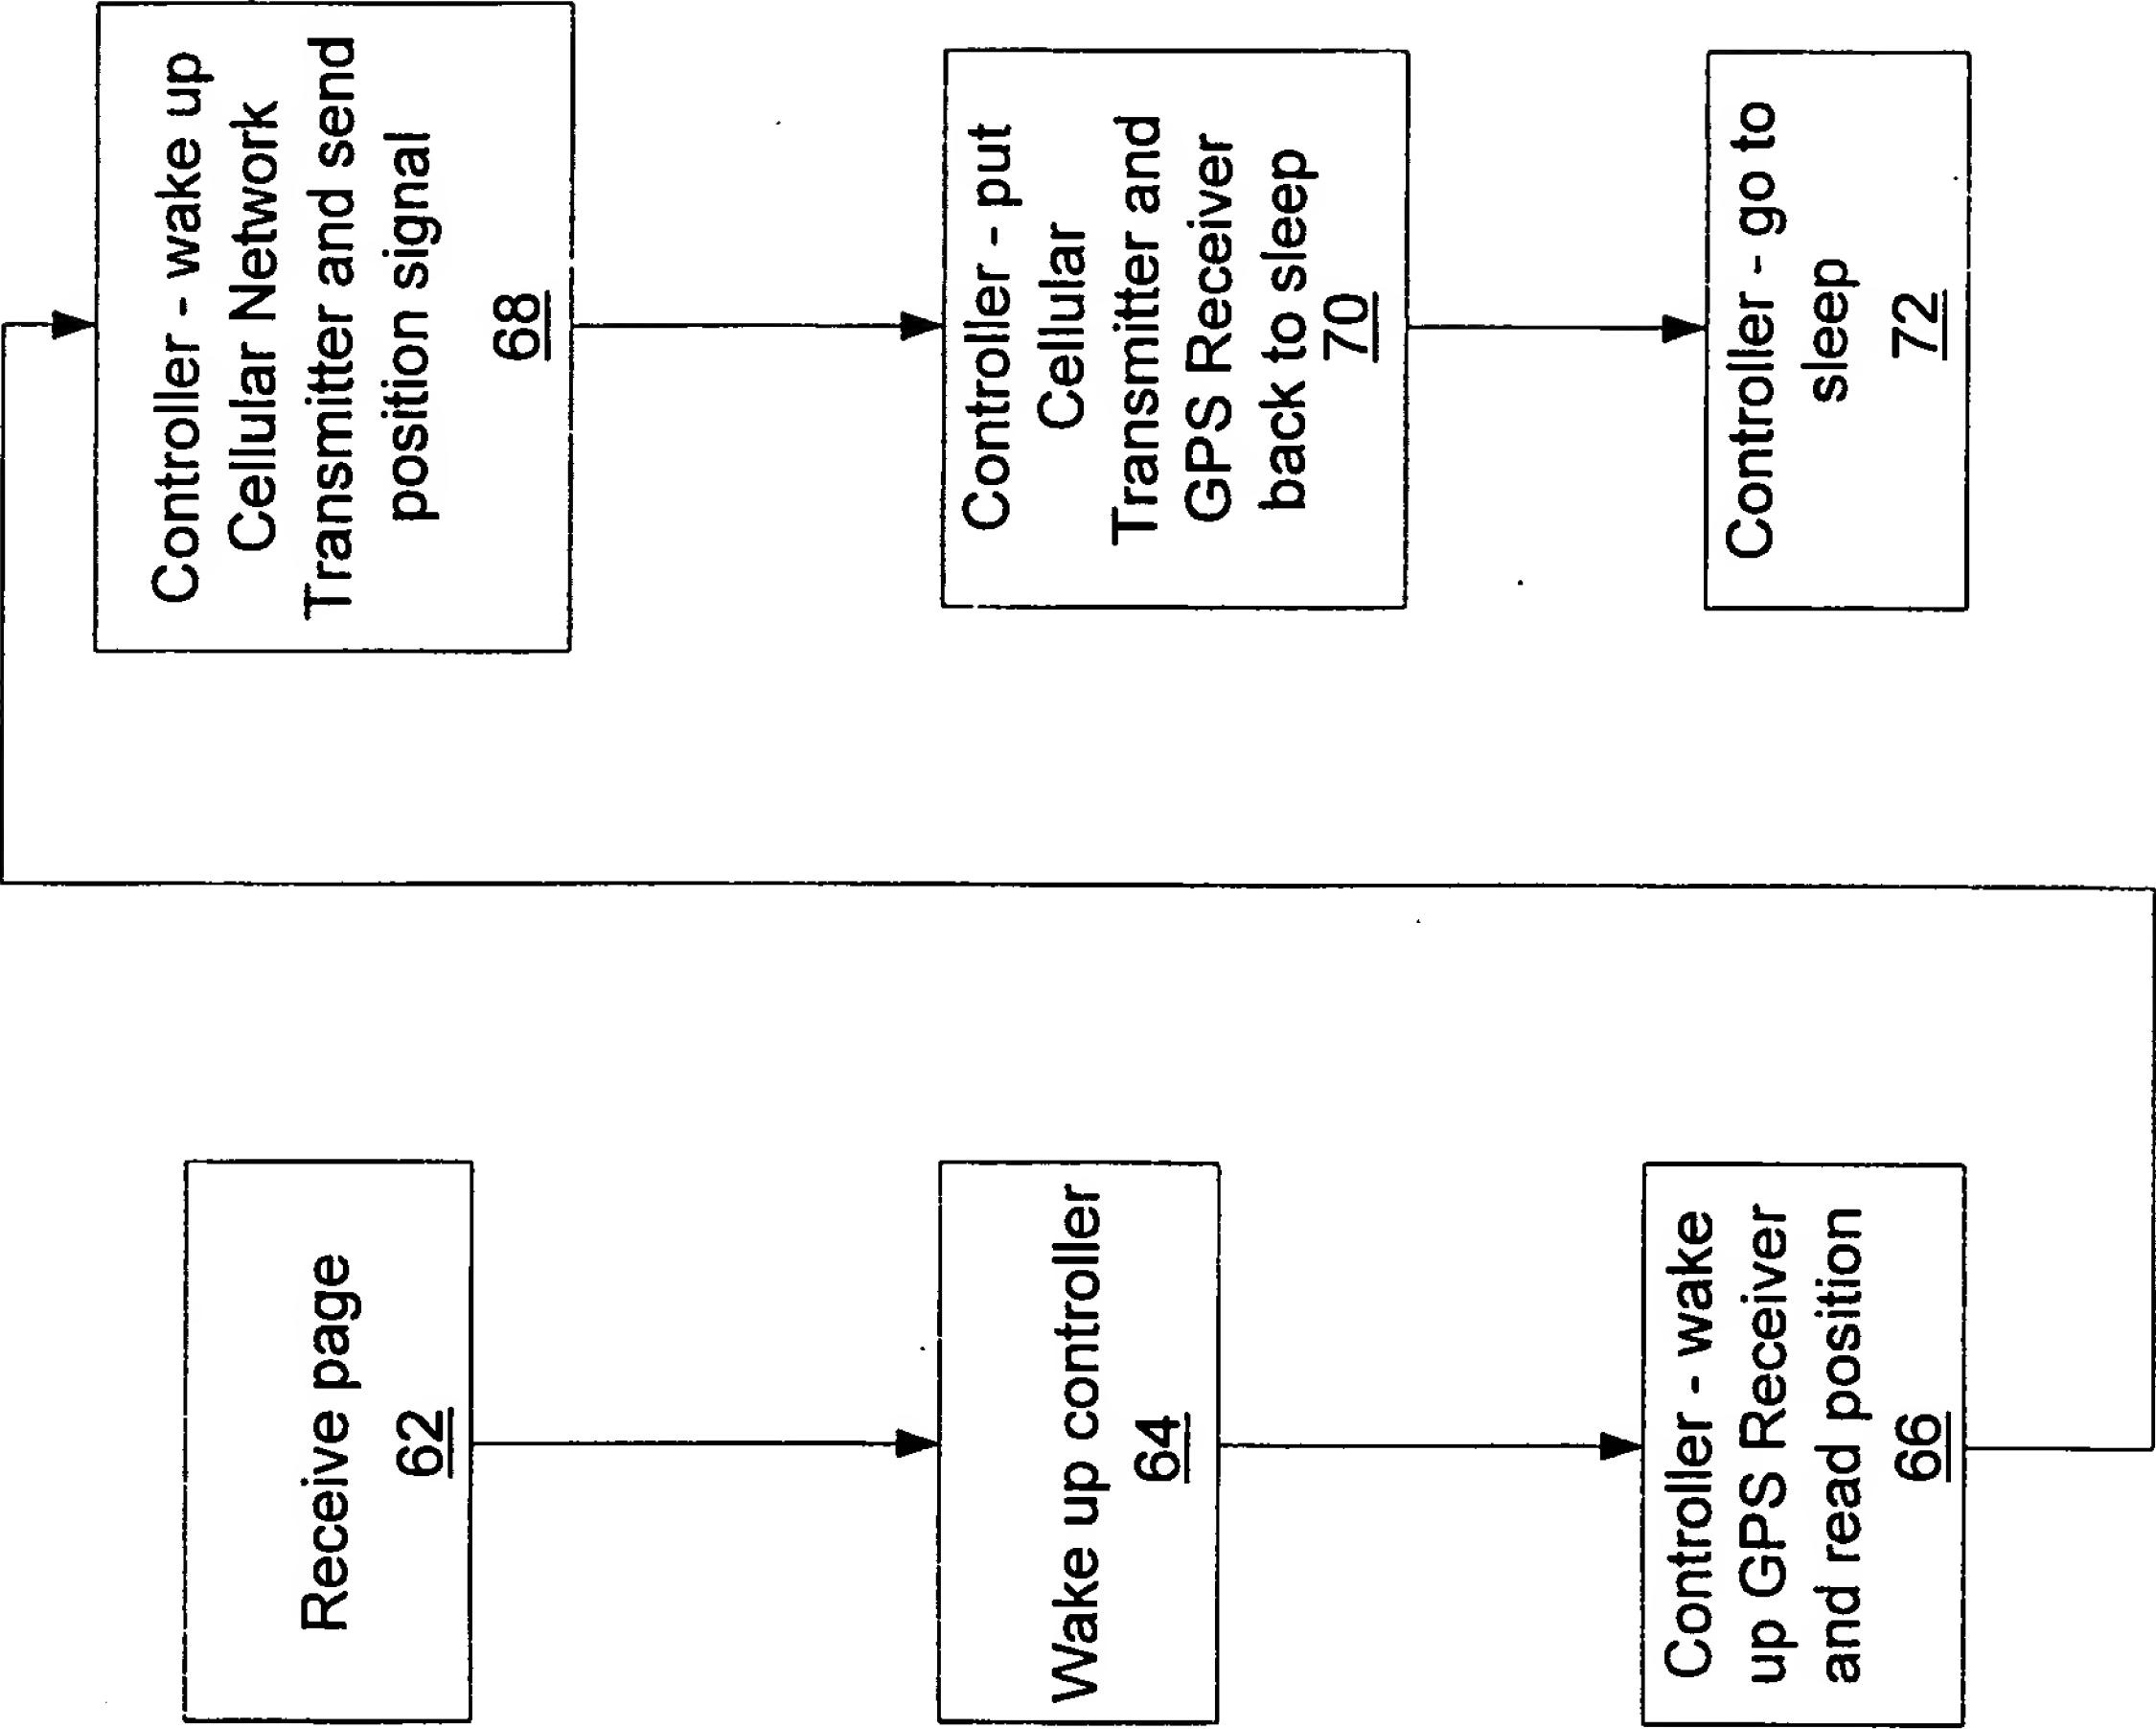


Fig. 3

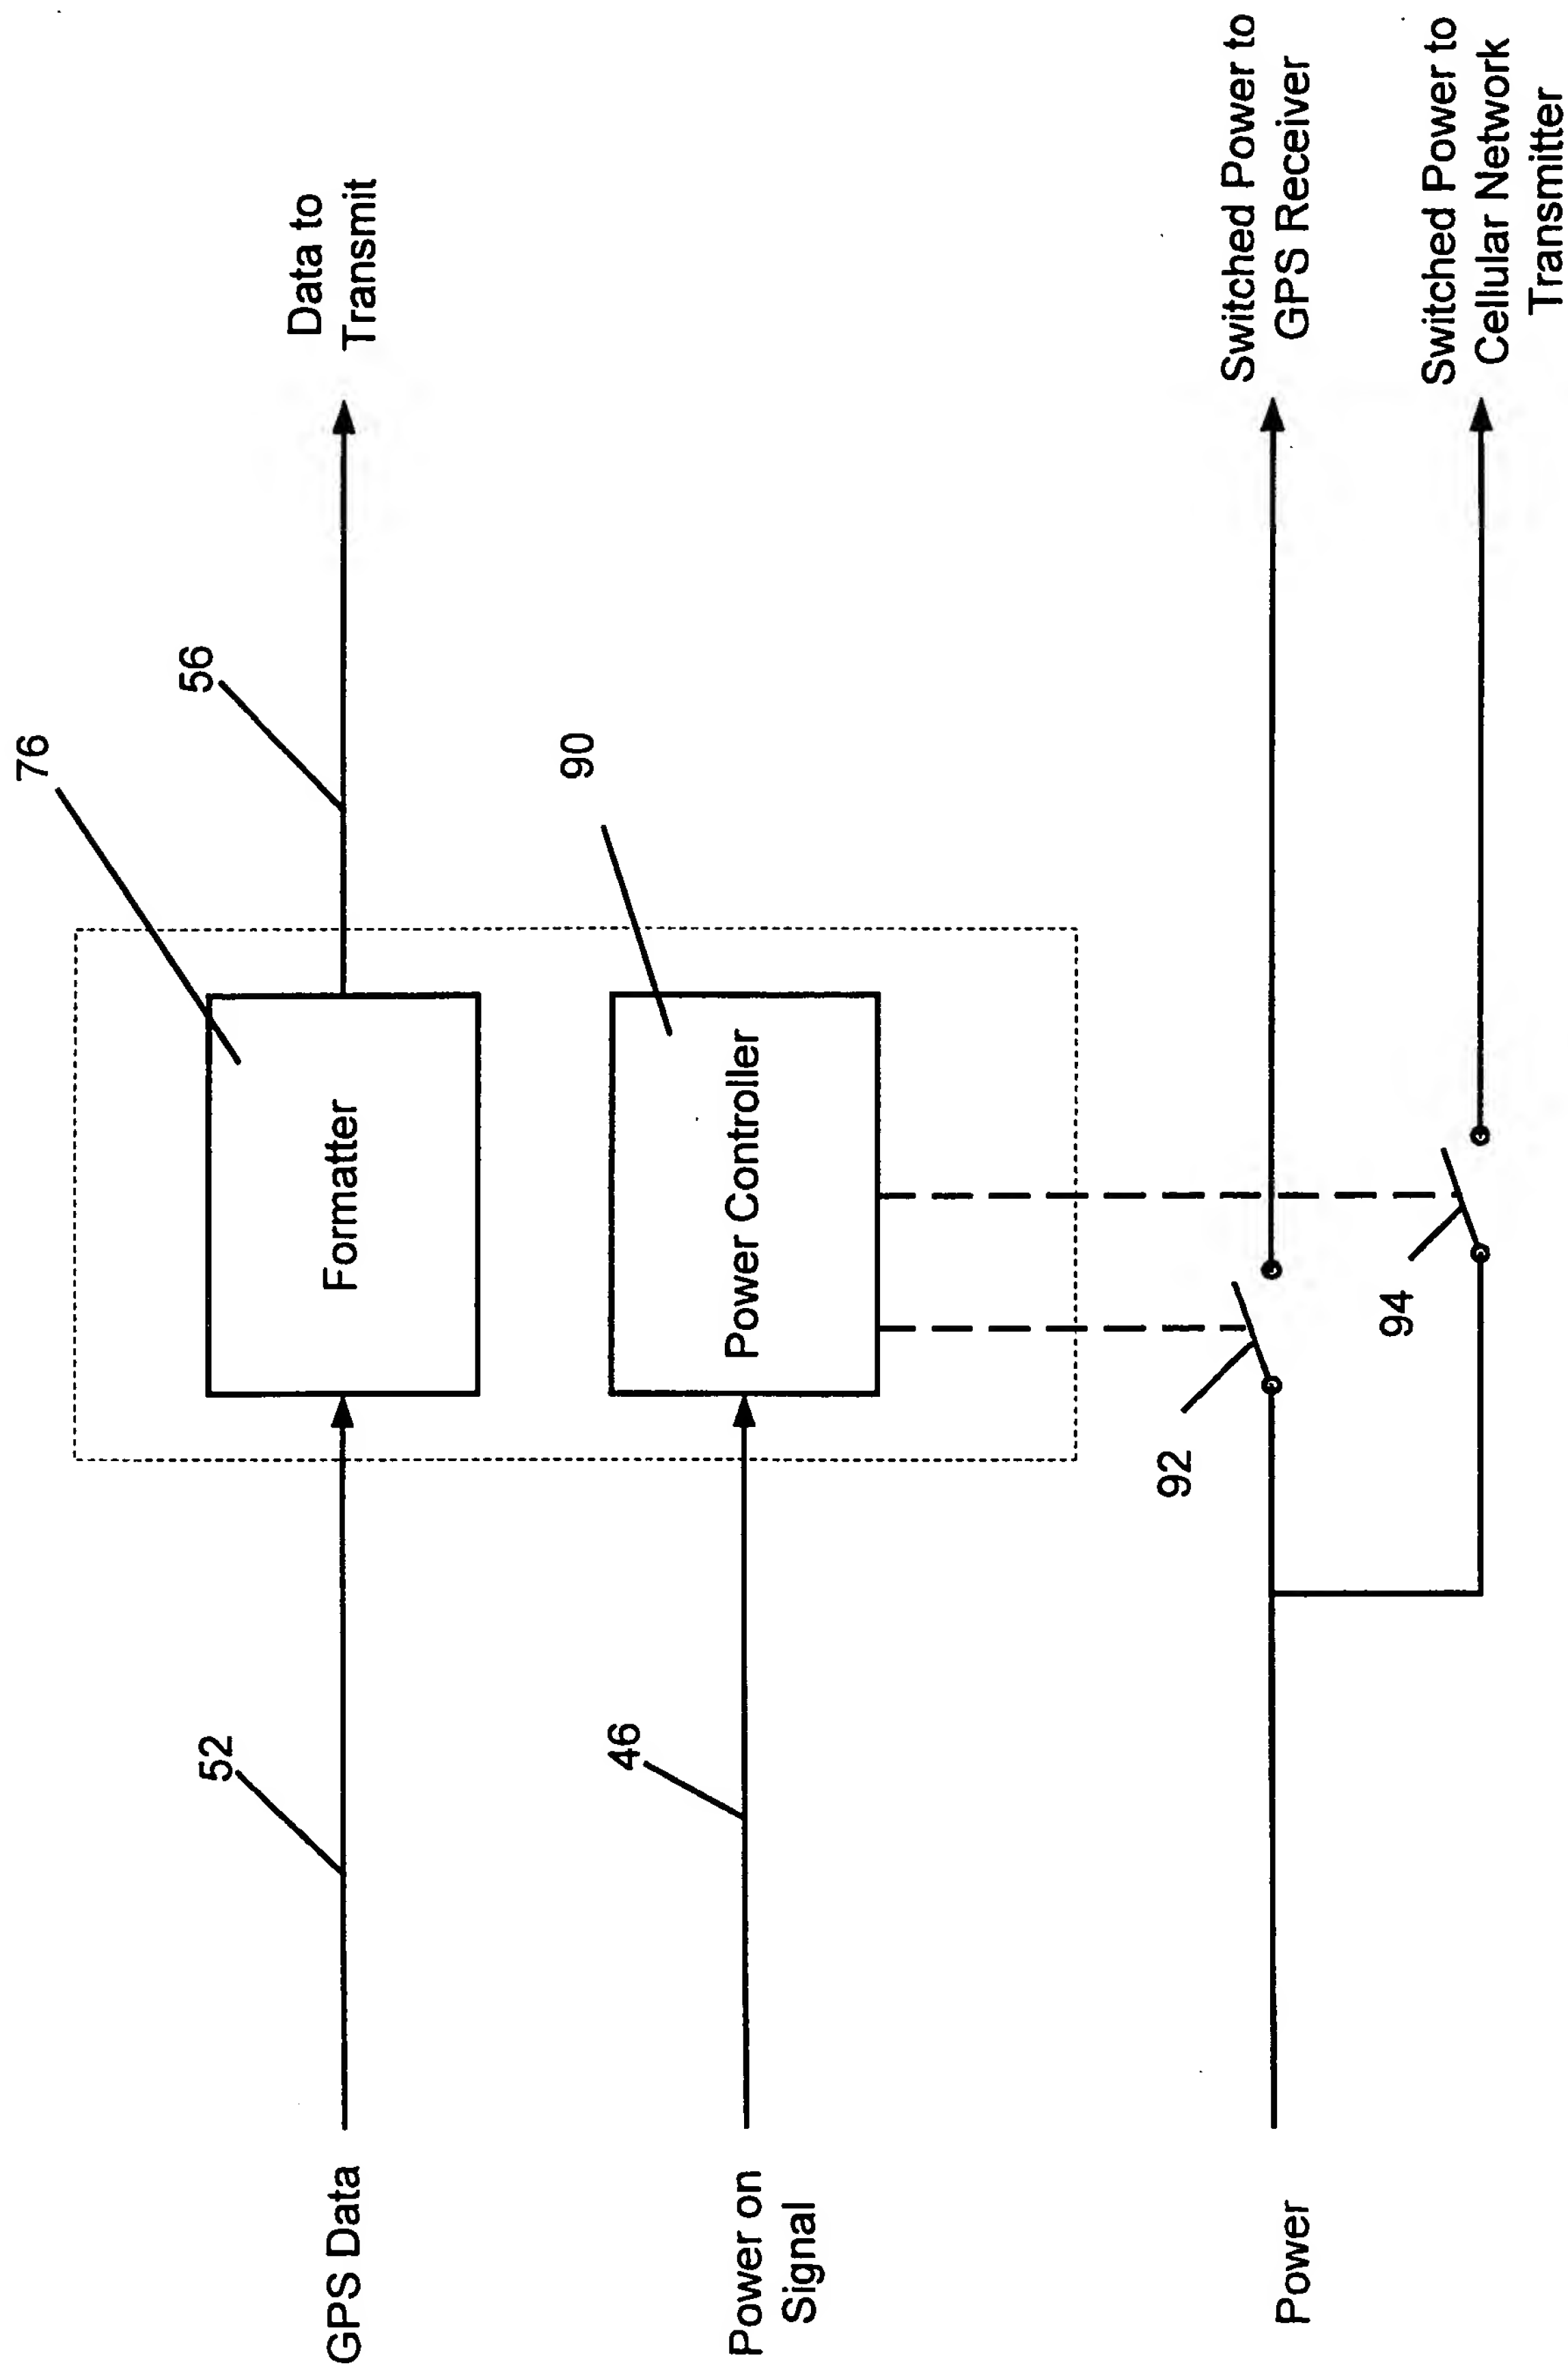


Fig. 4

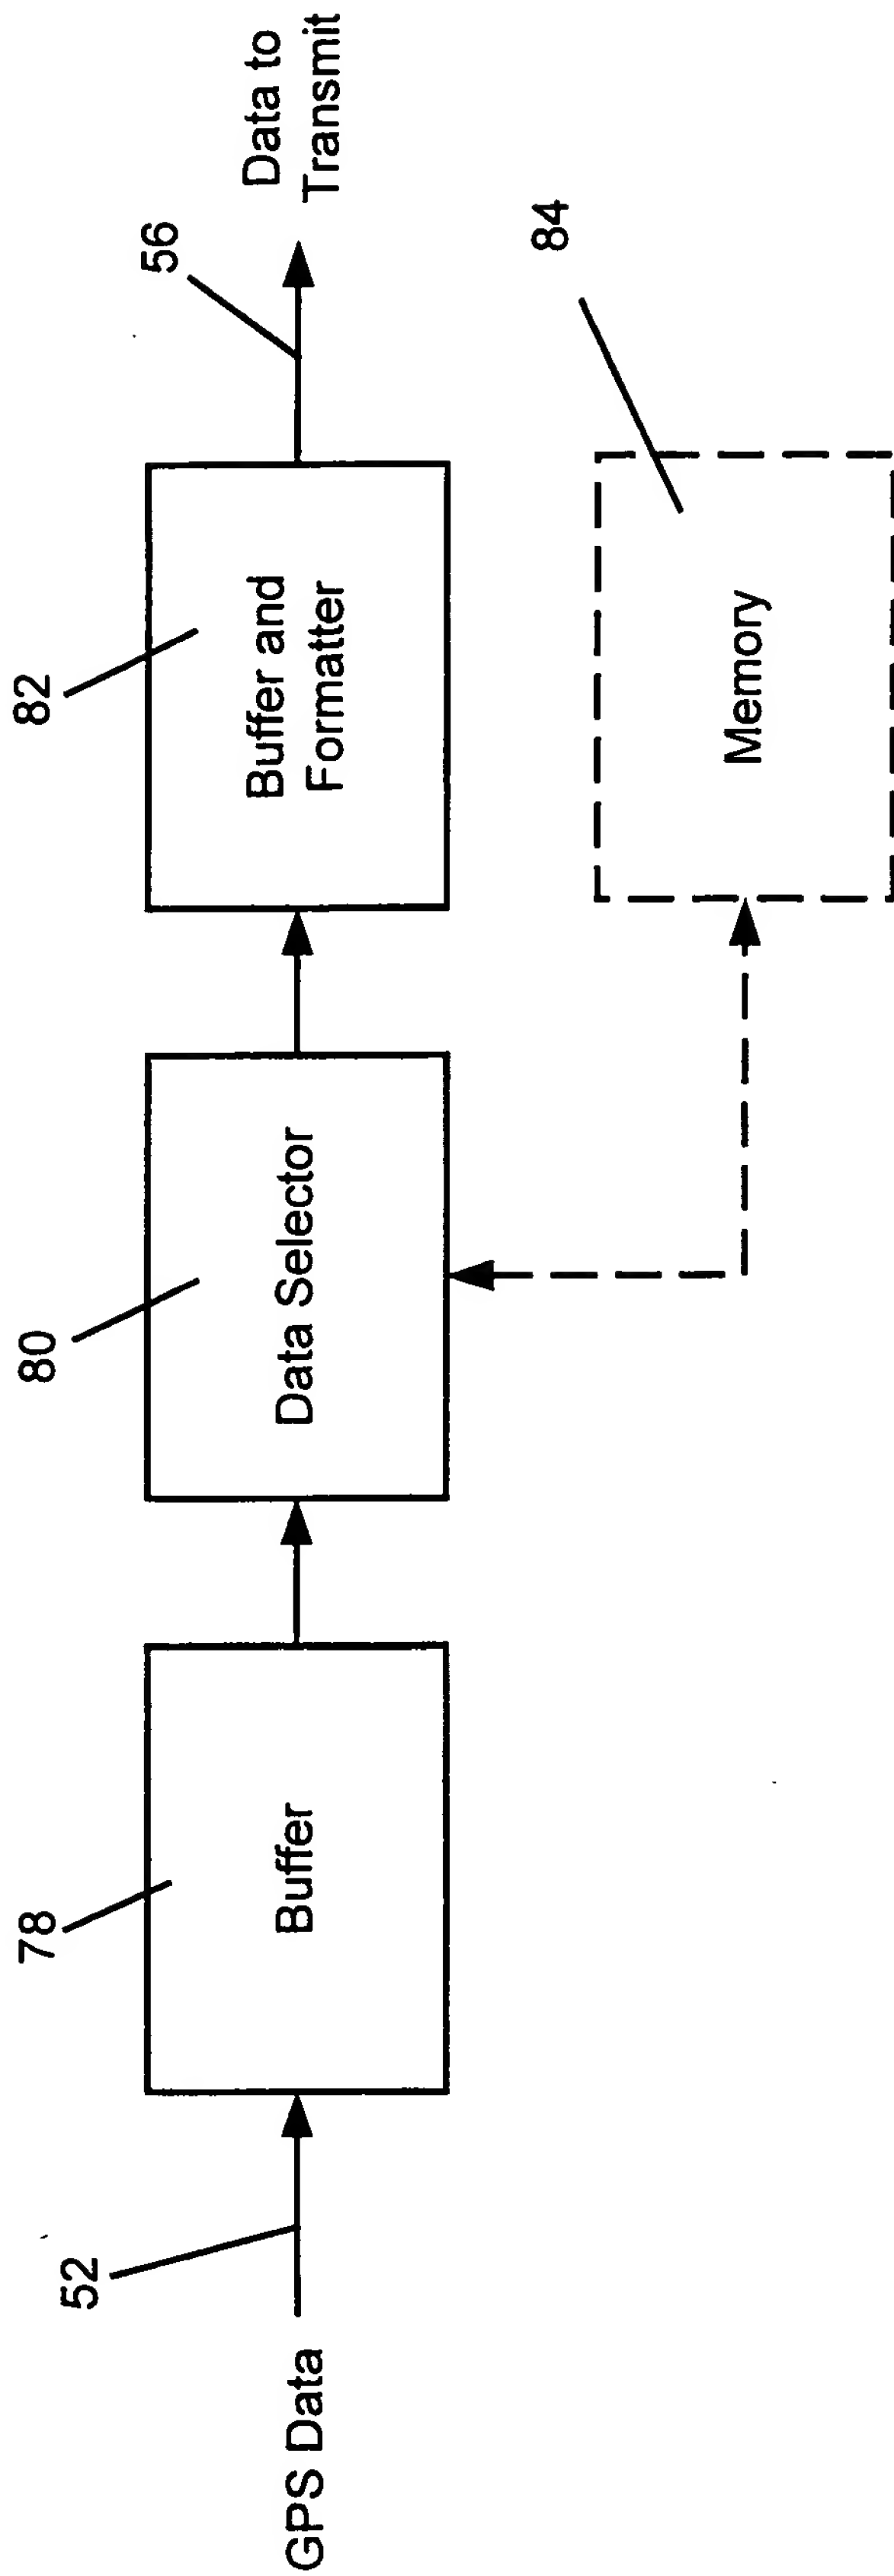


Fig. 5

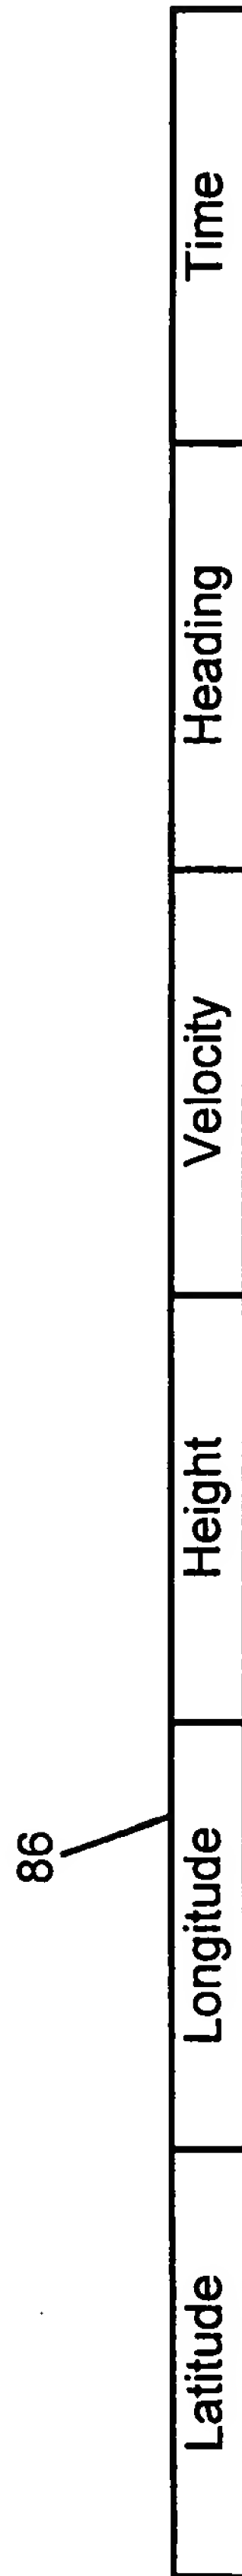


Fig. 6

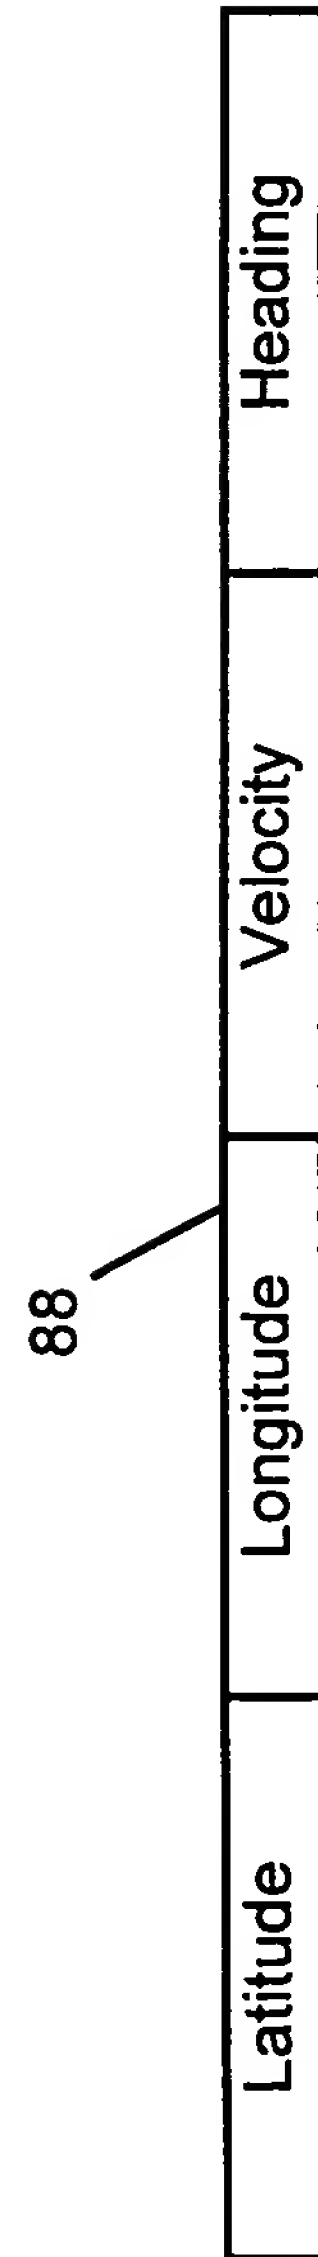


Fig. 7

6/10

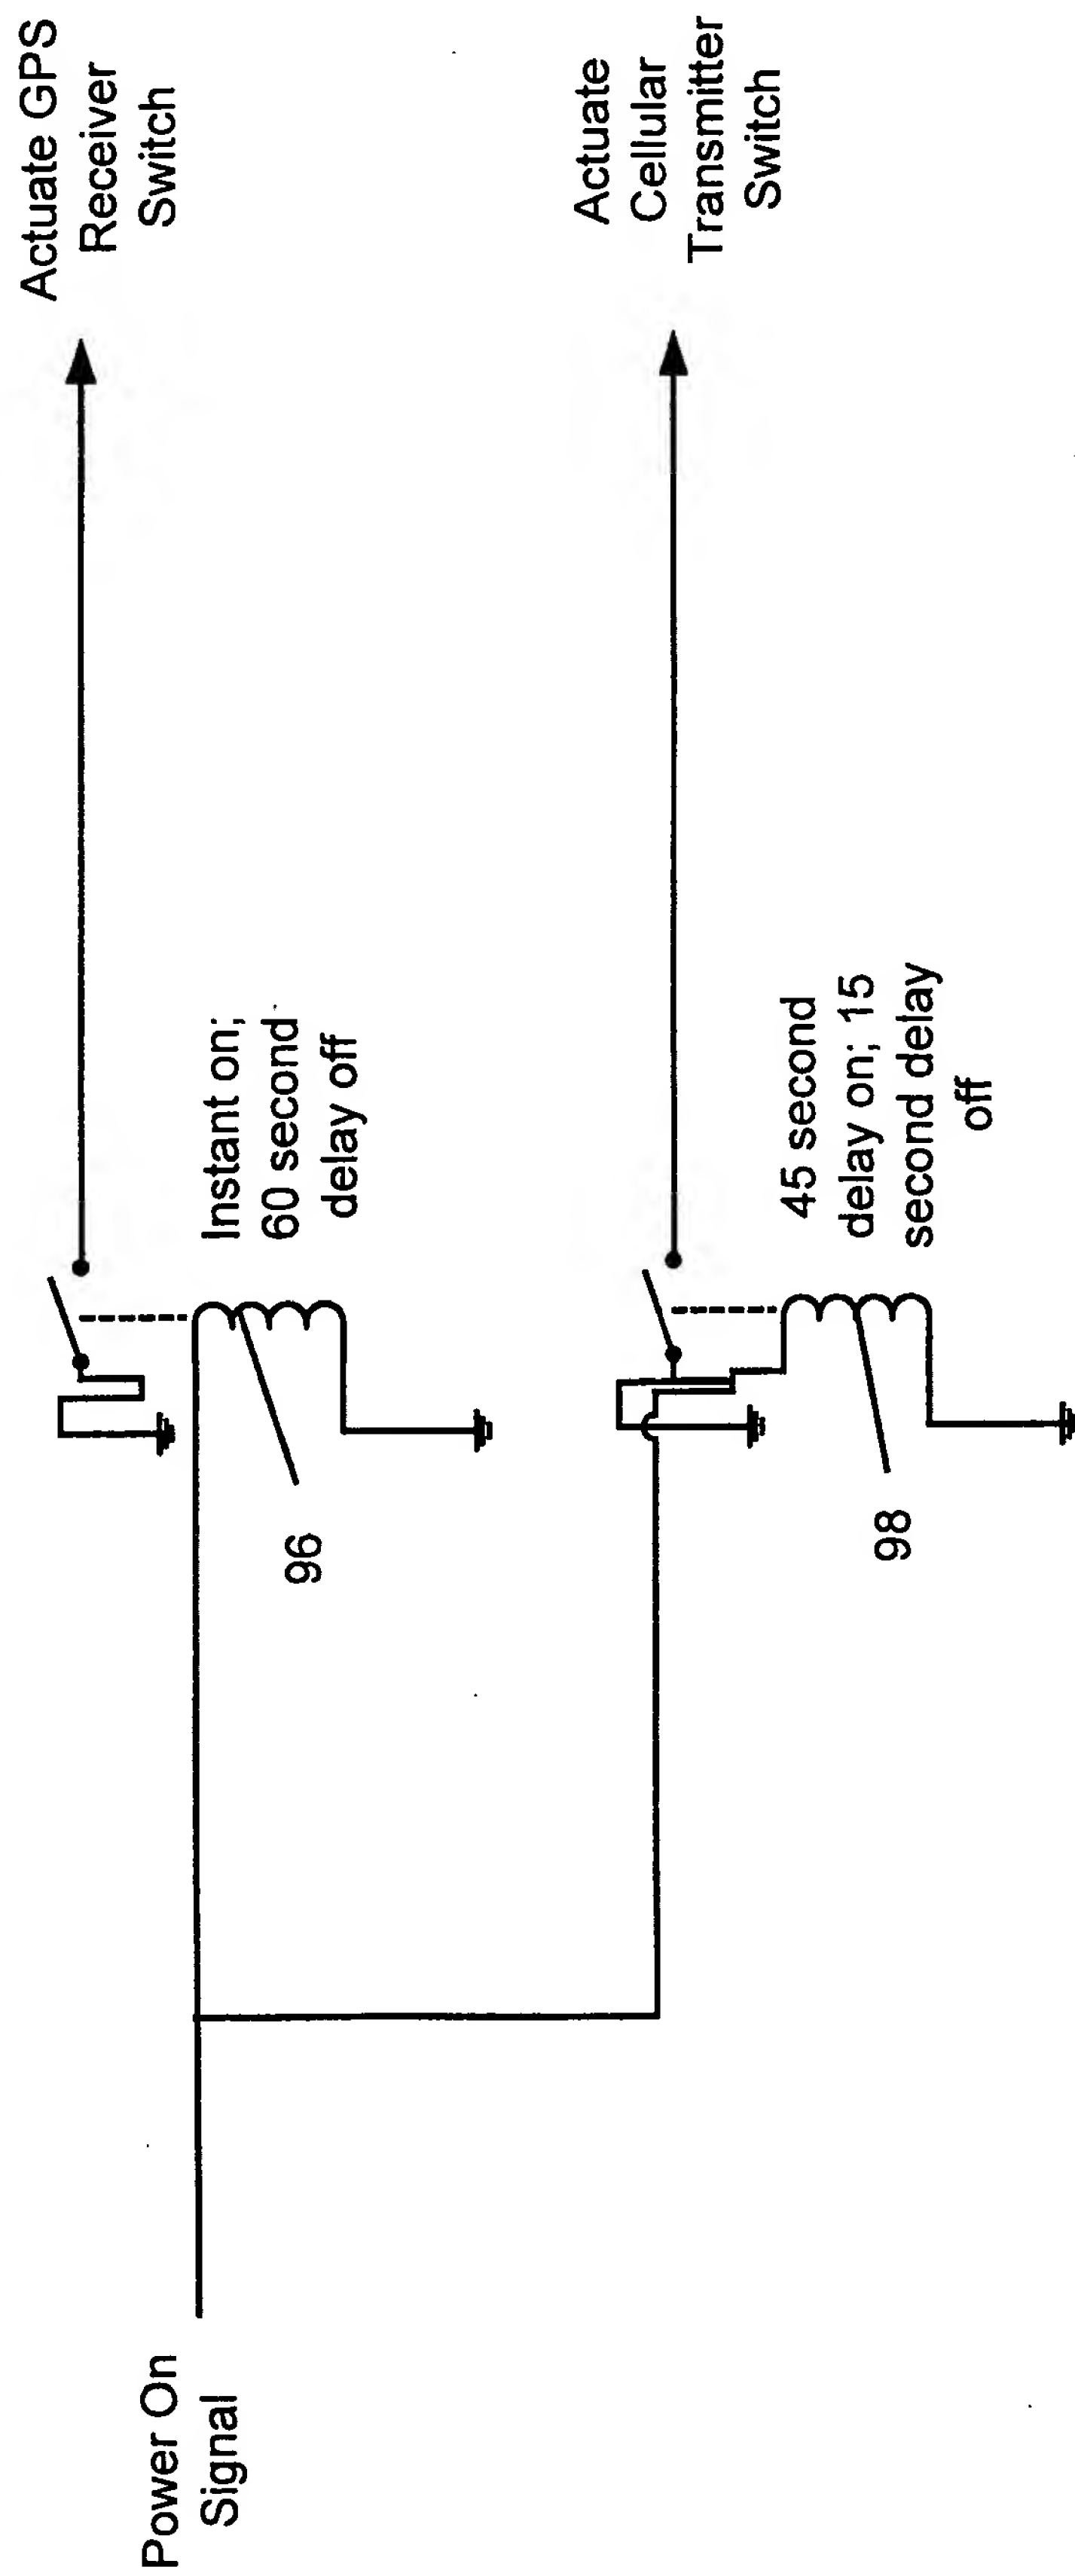


Fig. 8

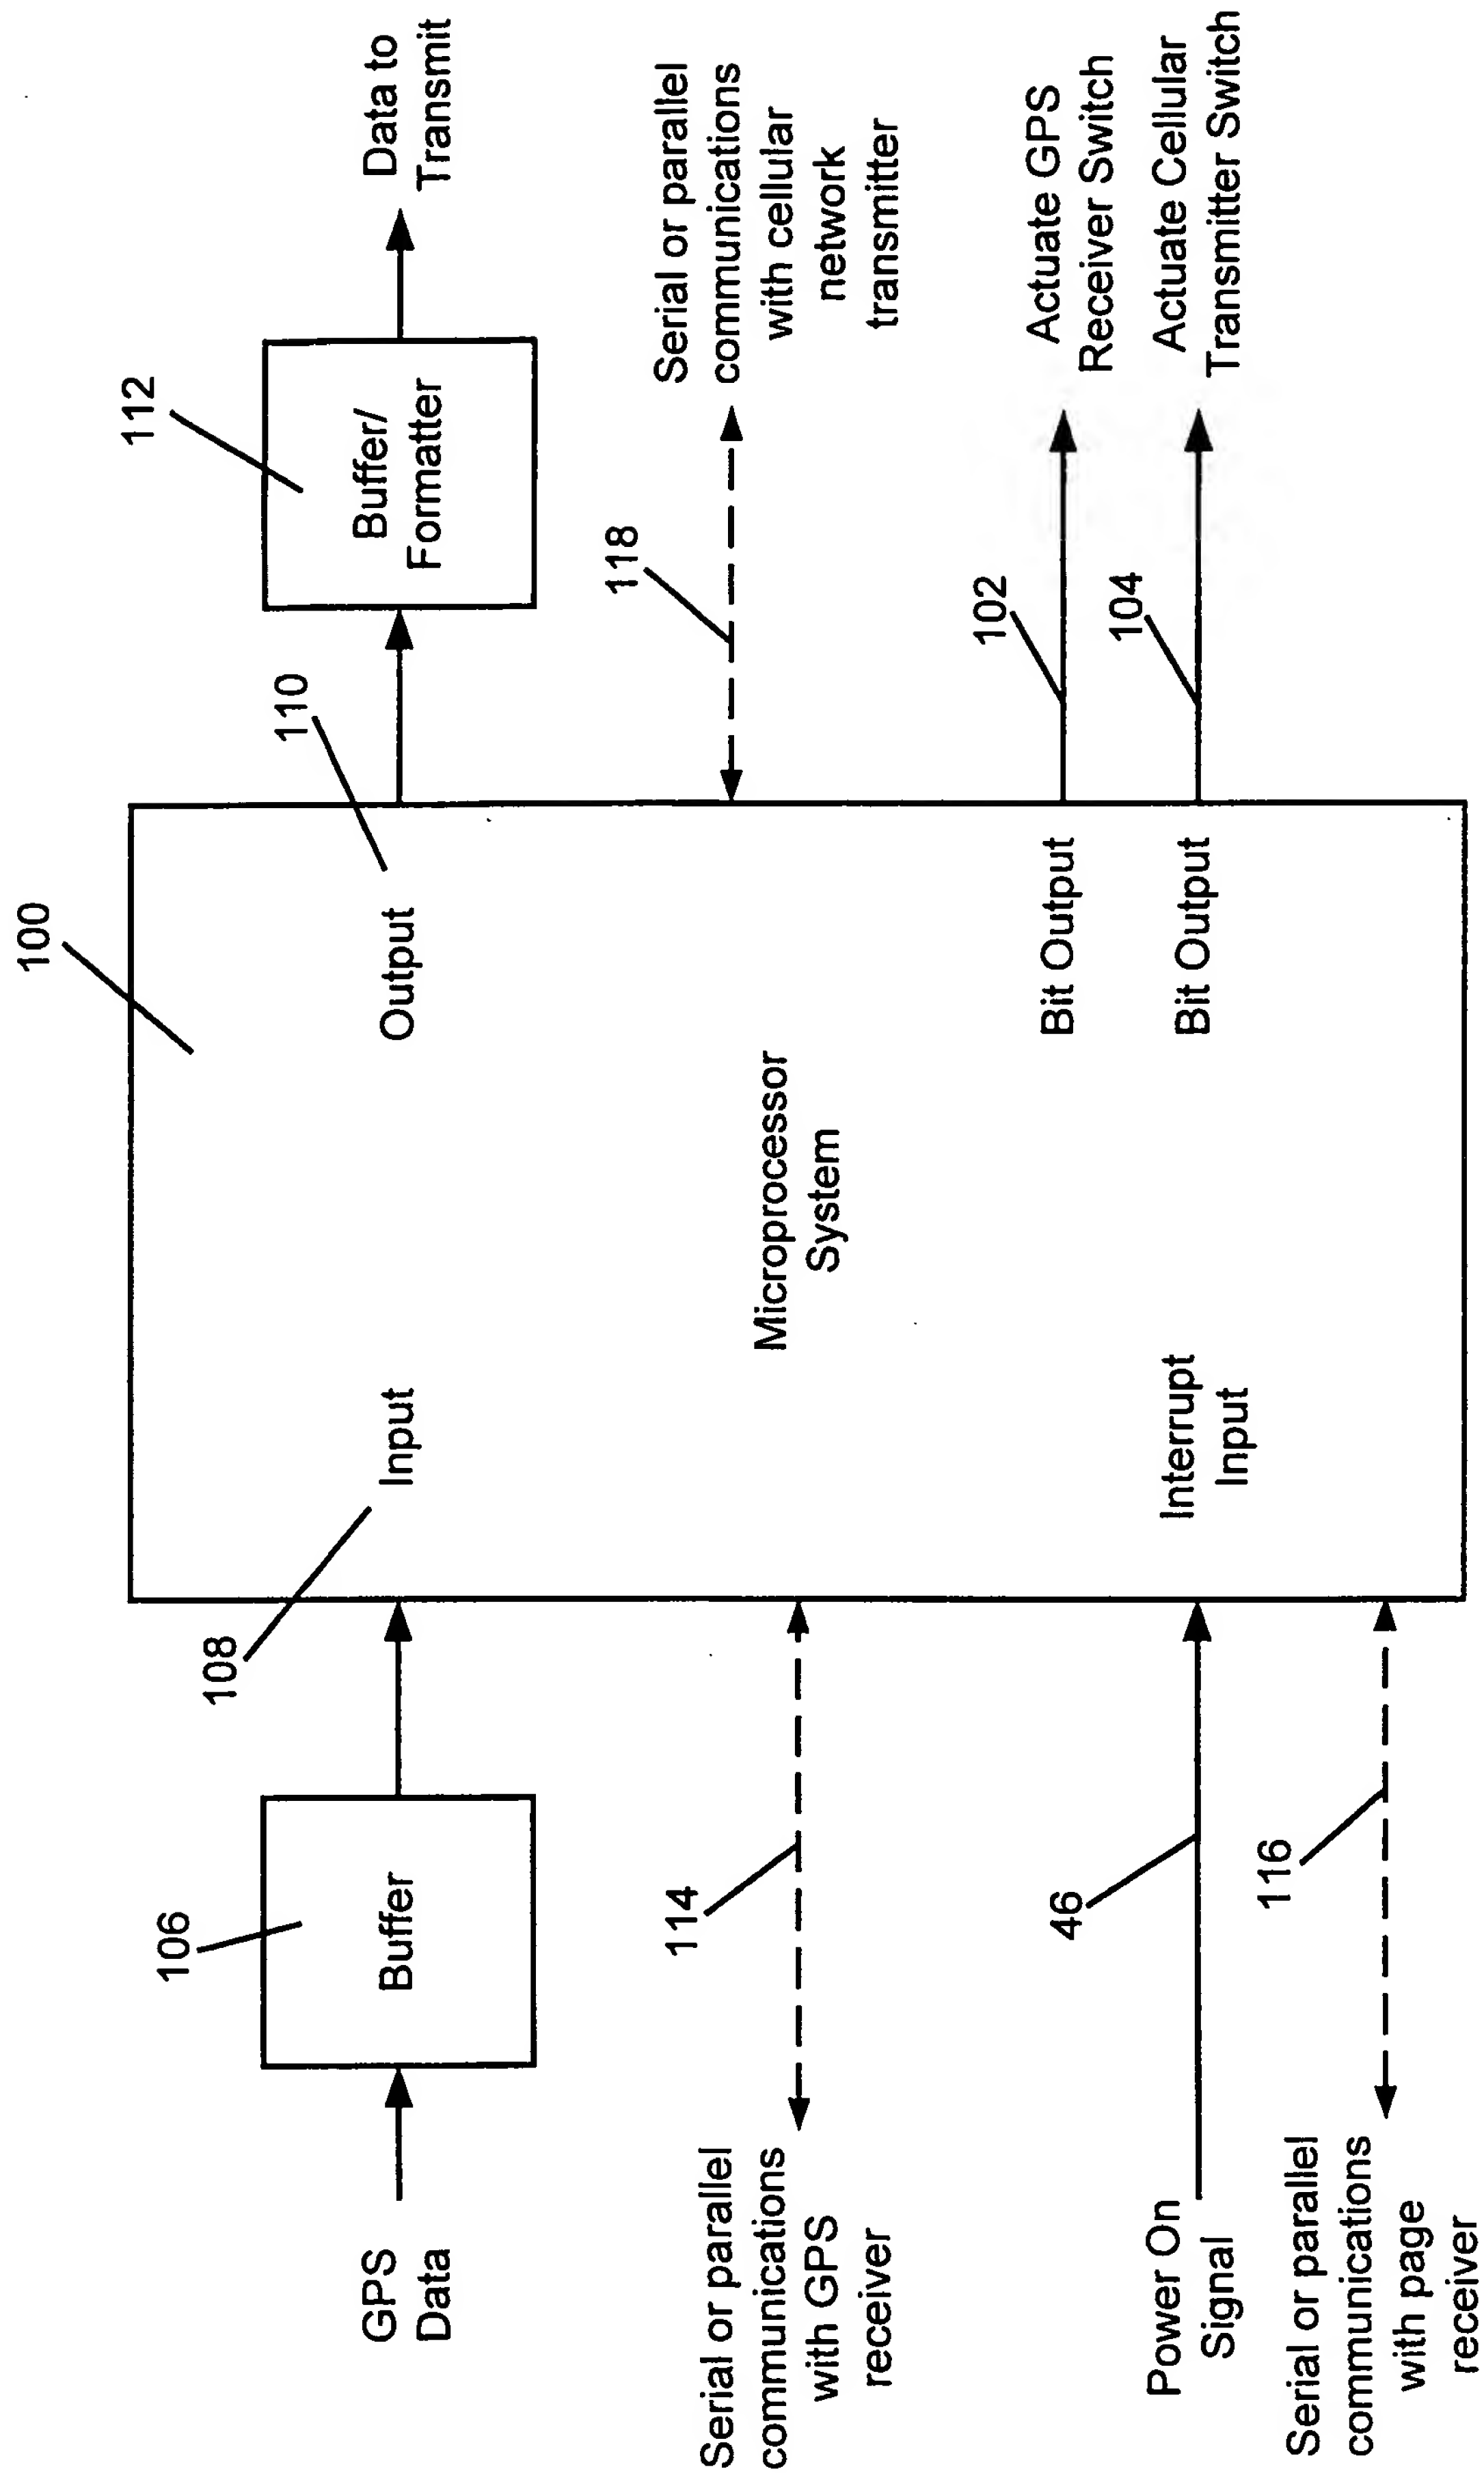


Fig. 9

8/10

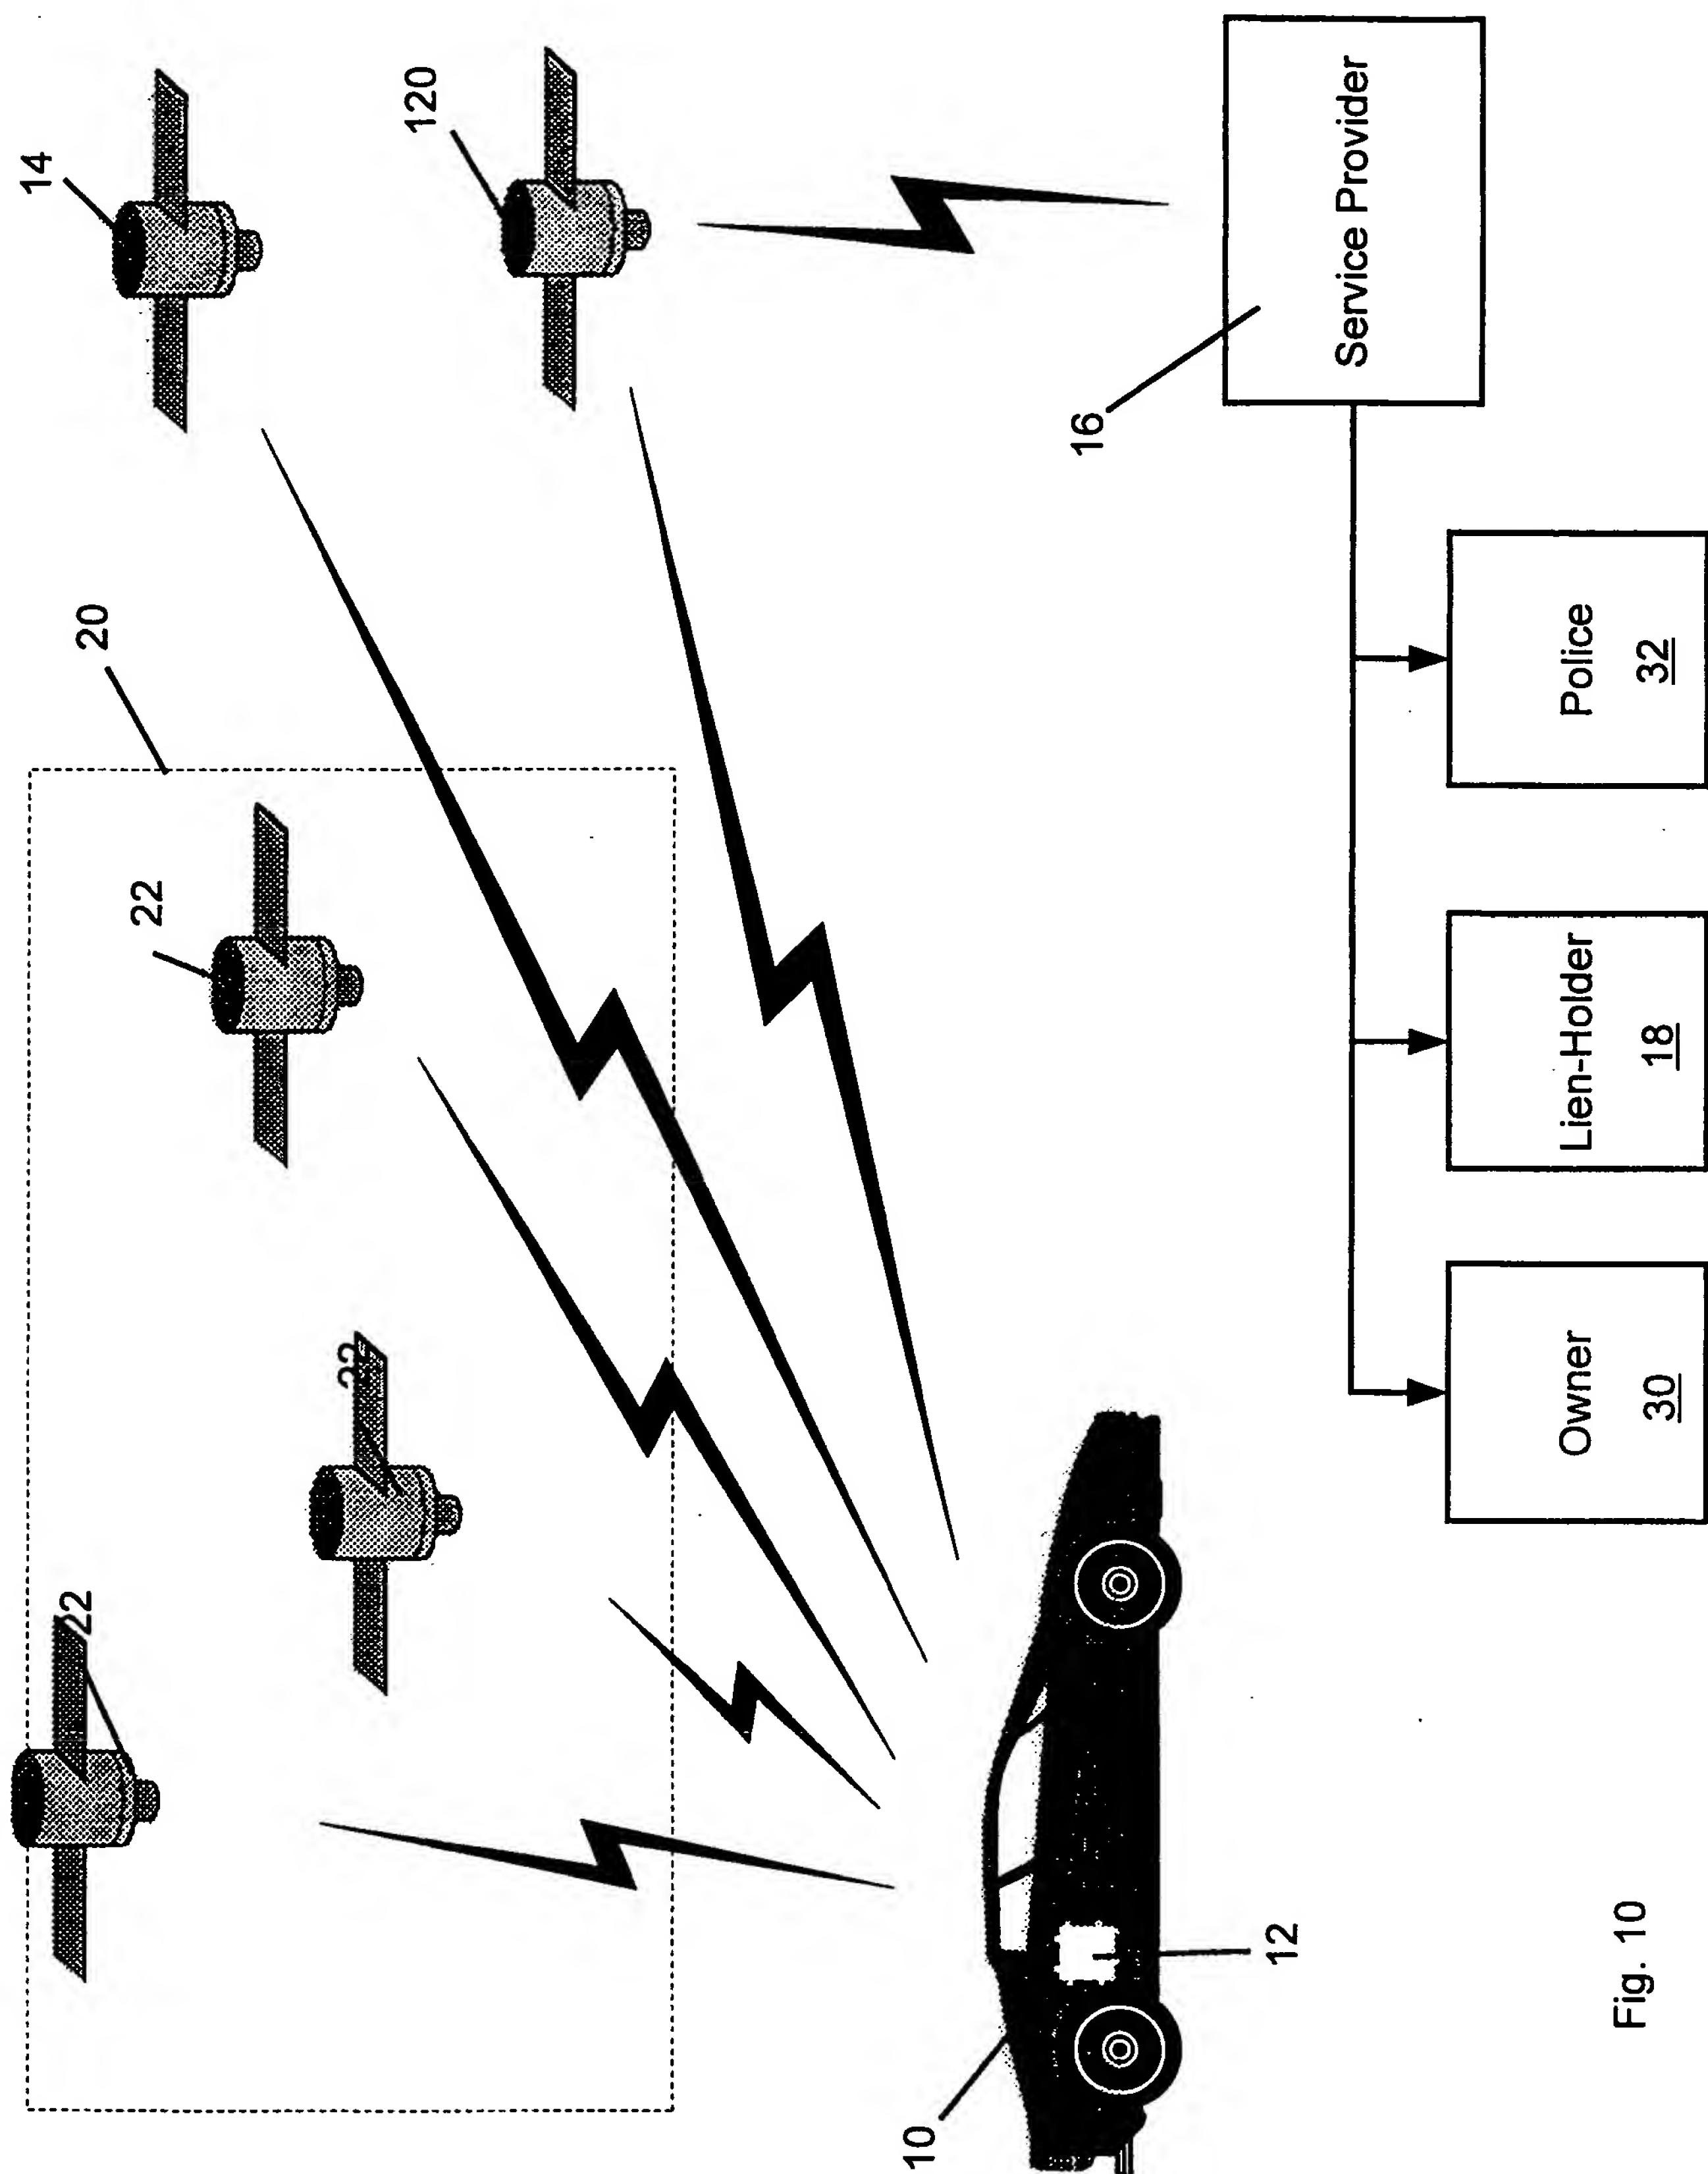


Fig. 10



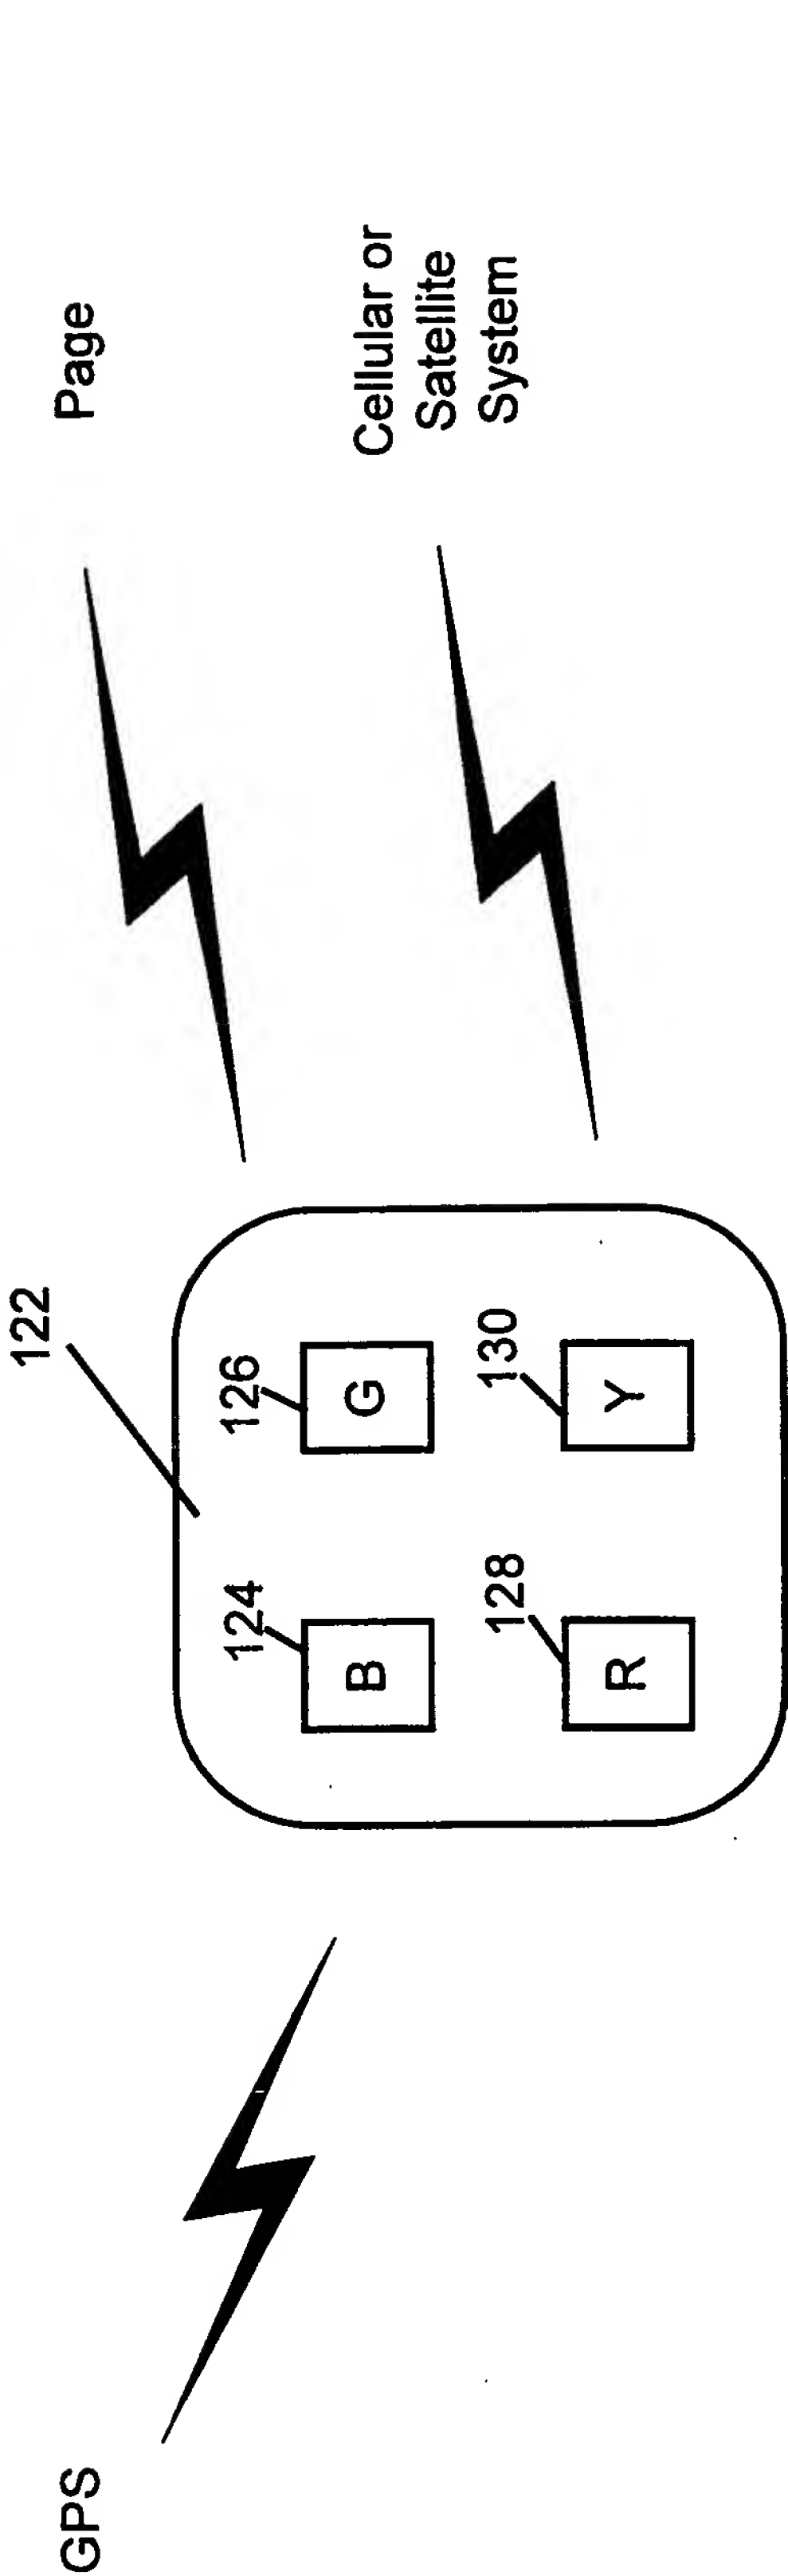


Fig. 11

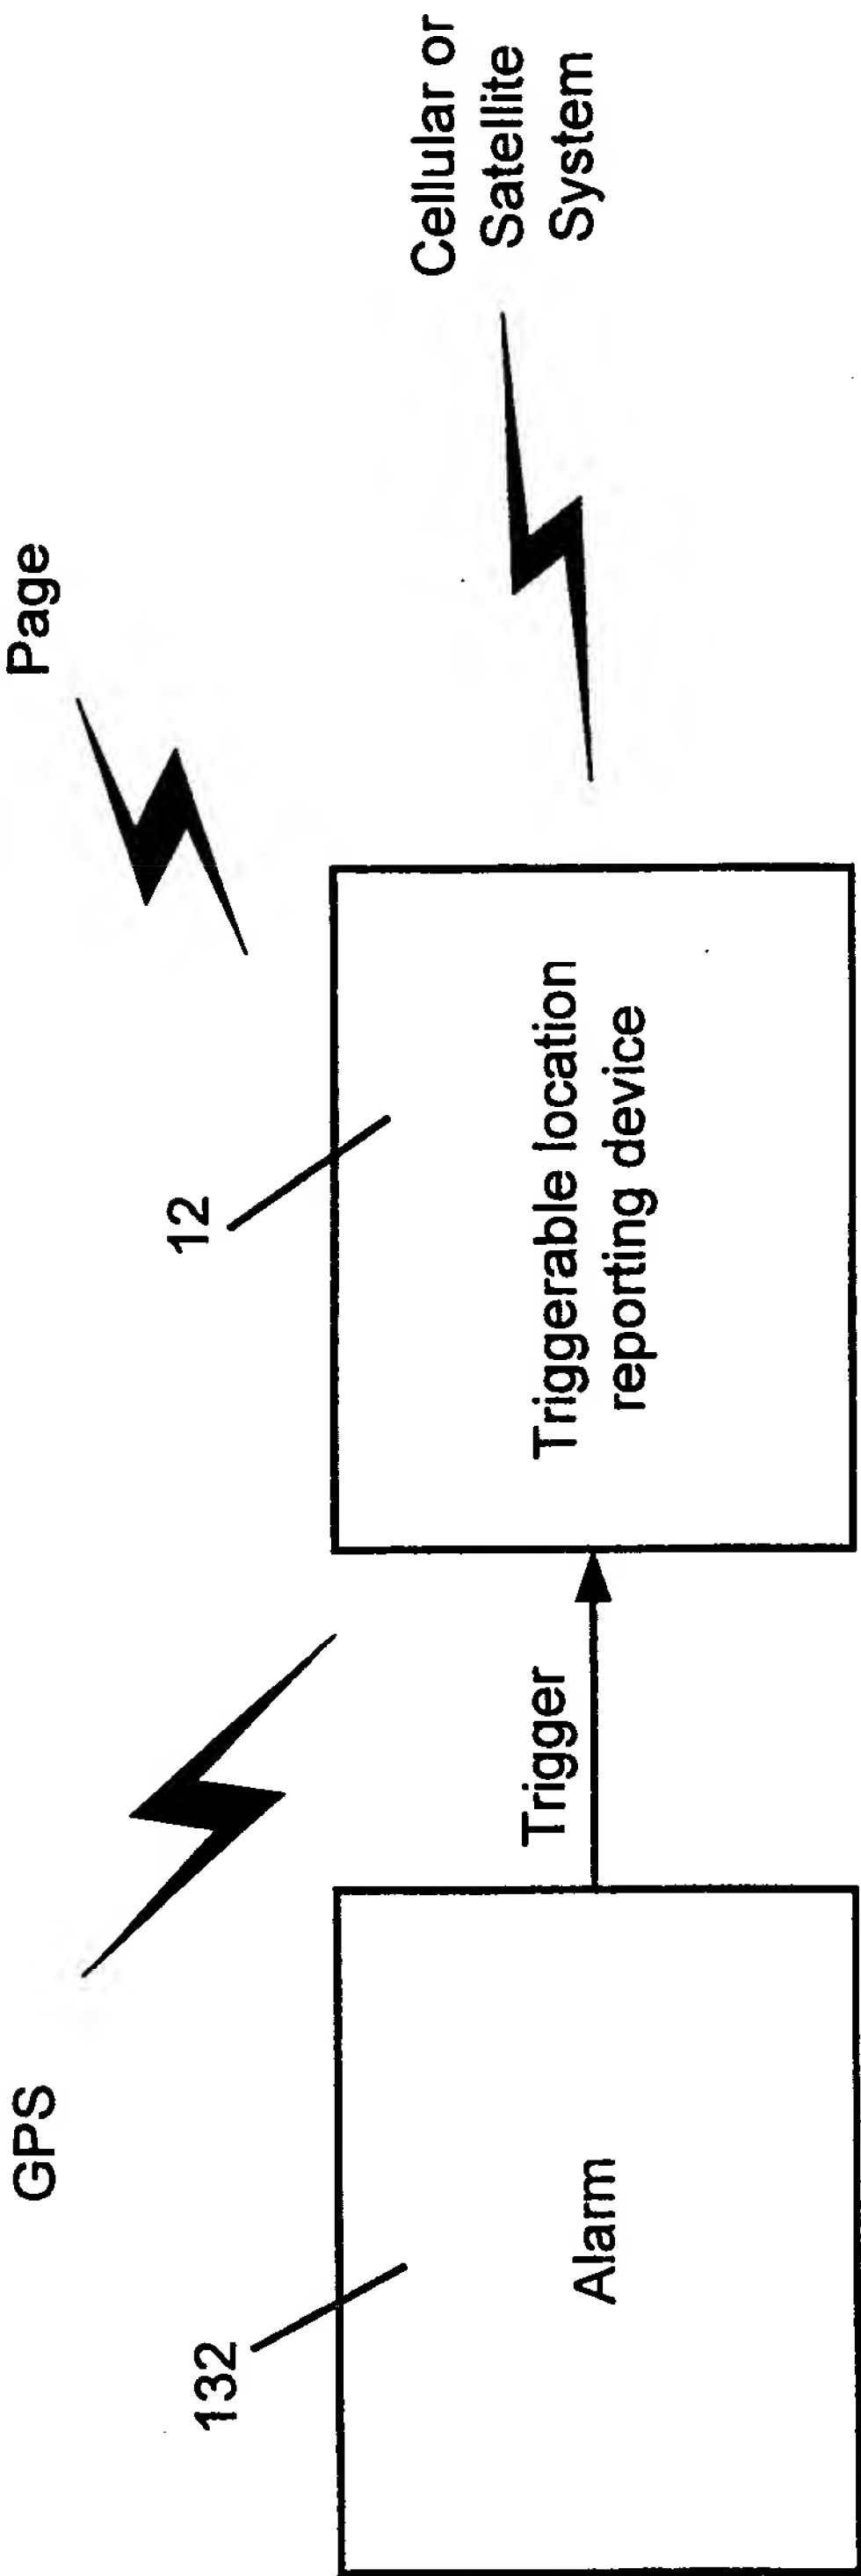


Fig. 12

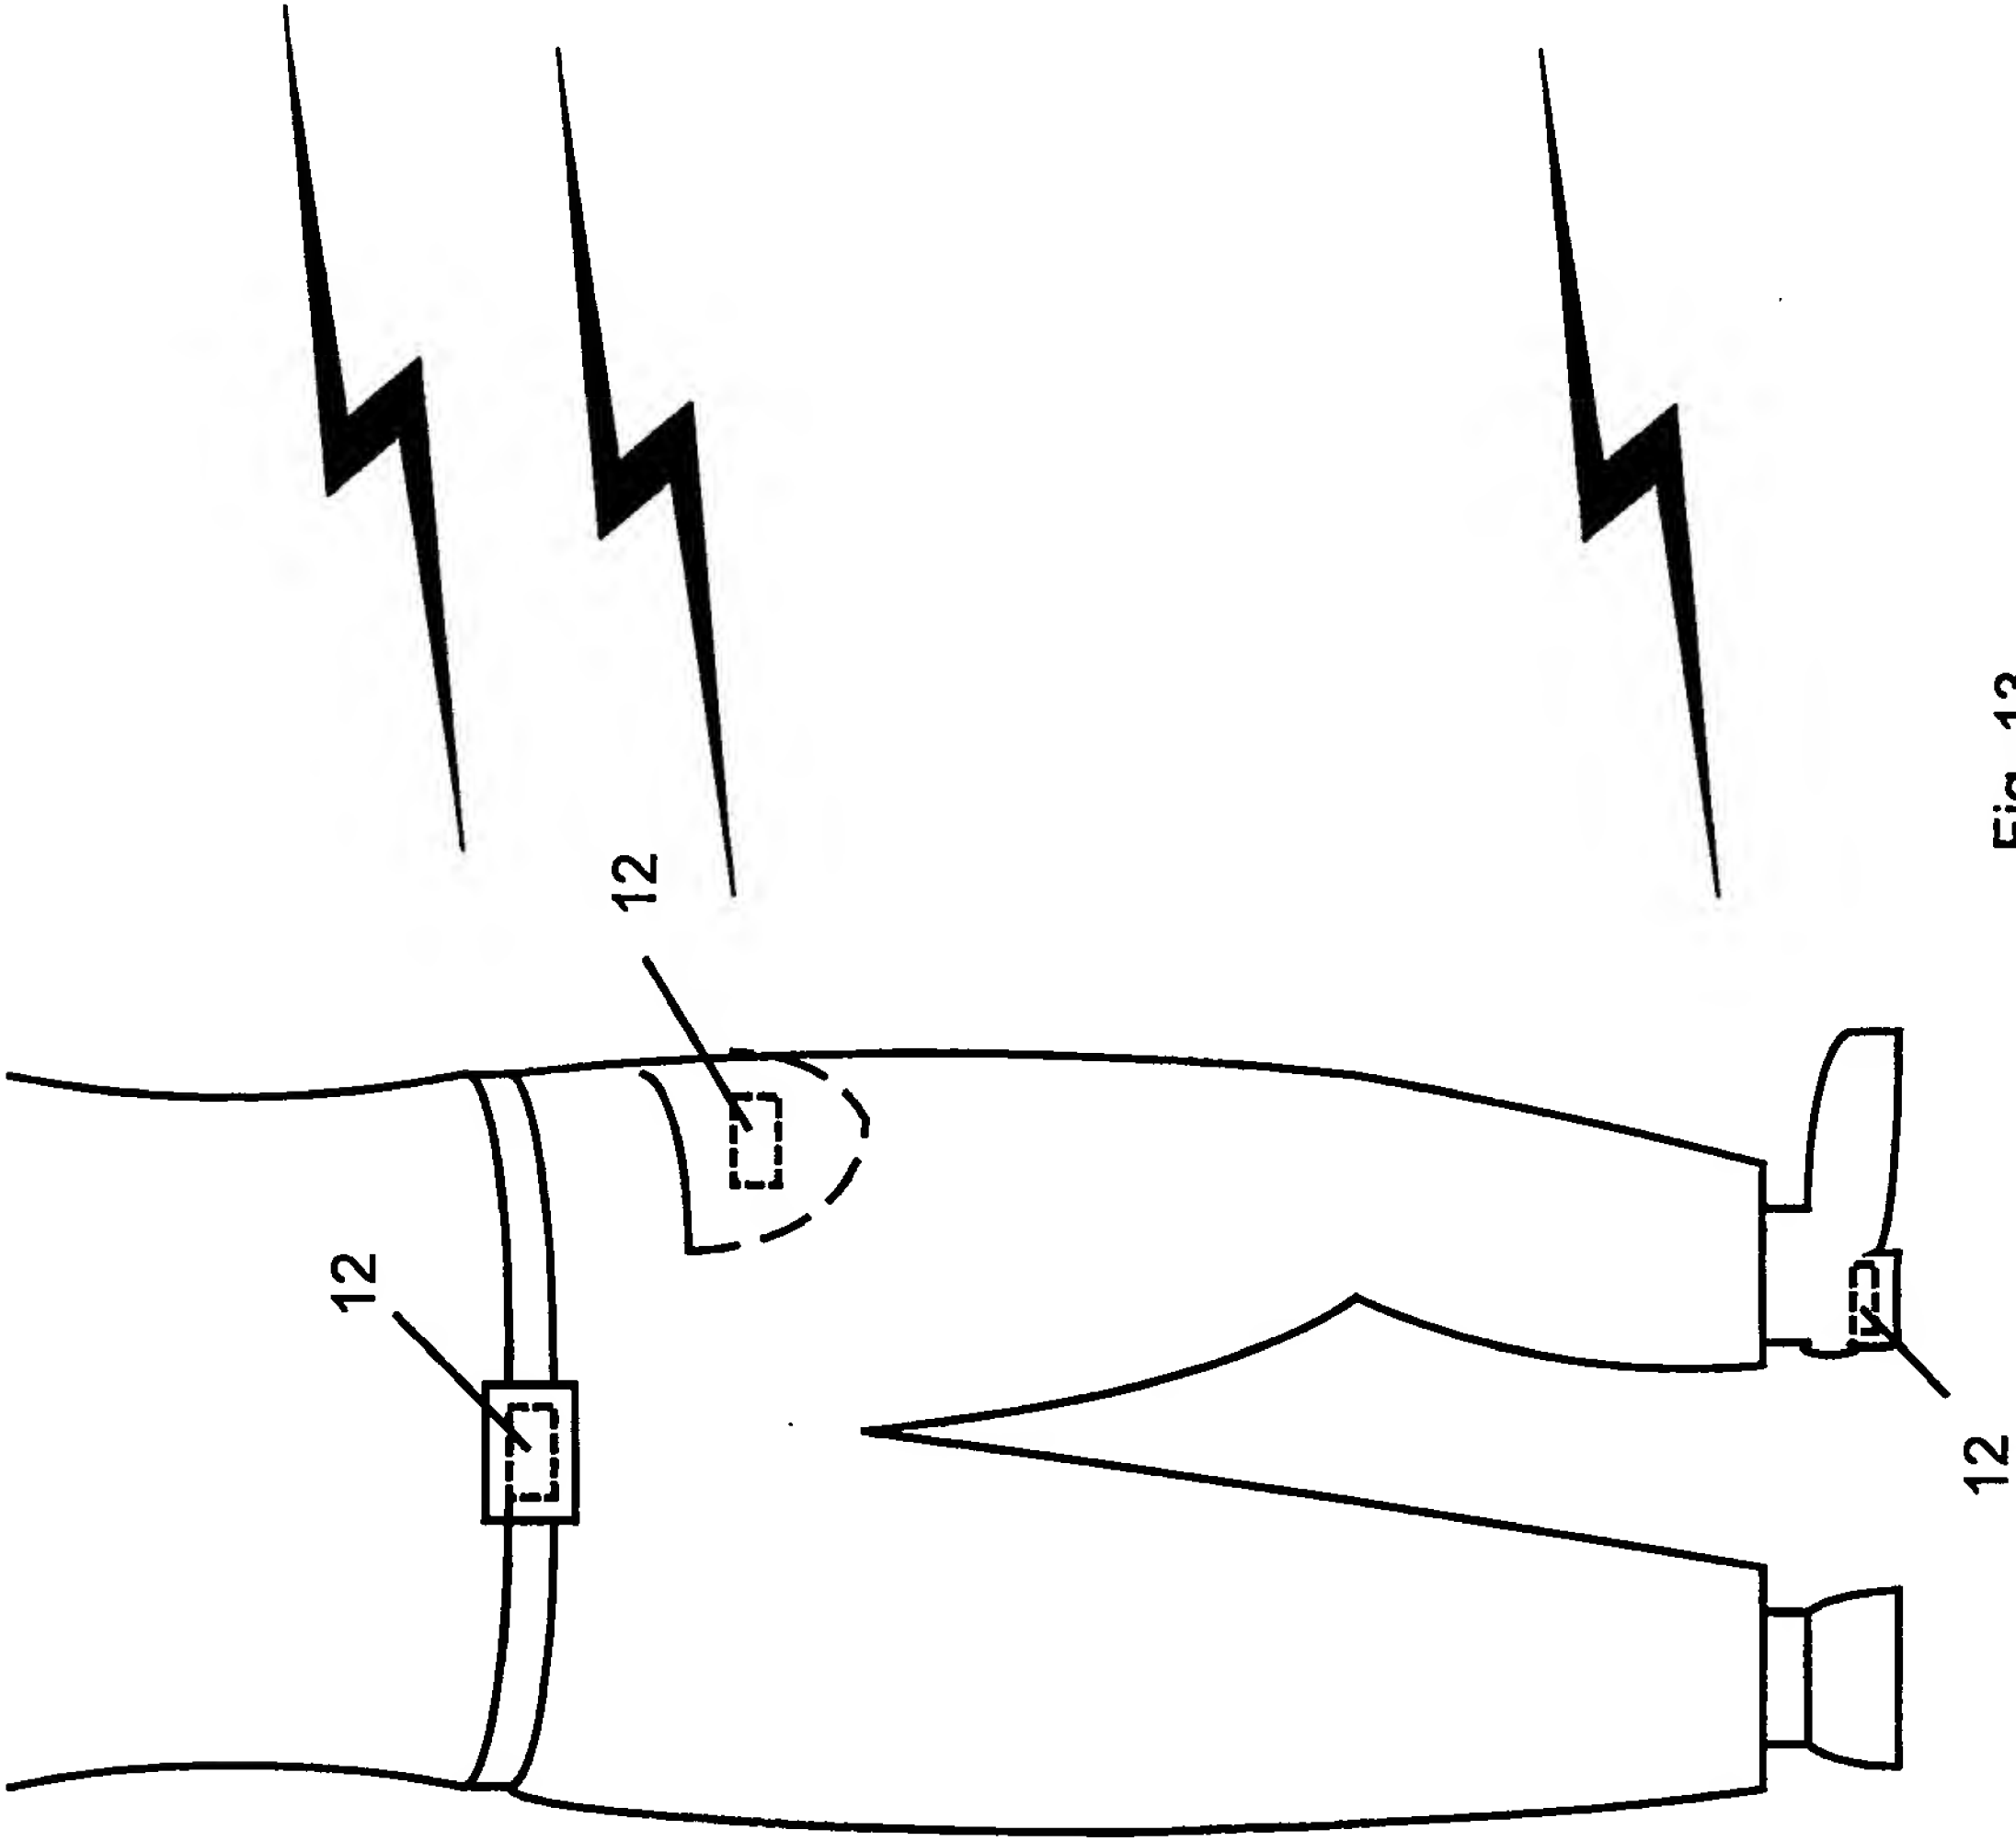


Fig. 13